


# PRICELIST

11/2022




[www.rol-ex.com.pl](http://www.rol-ex.com.pl)



 **ROLEX** company manufactures modern agricultural machinery.

Our team has been working hard for the past 10 years to ensure that our machines are durable and reliable. We offer tillage implements, plows, cultivators, disc harrows or machines for demanding customers such as a multipurpose, modular, non-tillage cultivator. We also have individual orders tailored to the needs of modern agriculture.

Our mission is to create machines adapted to the ever-changing agricultural market. Our agricultural design and construction specialists are constantly updating and adapting them to changing conditions. We have our own engineering offices, machining centers and lasers to maintain excellent quality while maintaining competitive prices.

All  **ROLEX** machines are built to meet the real needs of agriculture, so they are ideal for any terrain. We know that efficient, fast and durable solutions lead to improved yield productivity and farm development. That's why our machines offer strength, flexibility and modernity.



# TABLE OF CONTENTS

<b>CULTIVATION</b>	
<b>AUT</b> Cultivator	8
<b>AUTH</b> Cultivator with hydropack	10
<b>AUTW</b> Cultivator/seed drill, including tyre and transport roller	12
<b>BTW</b> Disc harrow for vineyards	14
<b>BTM</b> Disc harrow mini	16
<b>BT</b> Disc harrow	18
<b>BTHL</b> Hydraulic disc harrow, light folding	20
<b>BTHC</b> Hydraulic disc harrow, heavy folding	22
<b>BCC/BCCH</b> Hard/hydraulically folding Cross-Cutter harrow	24
<b>GB</b> Subsoiler	26
<b>GBI</b> Subsoiler with the option of aggregation of a second machine	28
<b>AUS</b> Cultivator/seed drill	30
<b>AUH</b> Hydraulically folding cultivator	32
<b>AUF/AUFH</b> Hard/hydraulically folding cultivator front	34
<b>BMH</b> Mulch harrow	36
<b>STUBBLE CULTIVATION</b>	
<b>APG</b> Gruber stubble cultivator	40
<b>KBO</b> No-till cultivator	42
<b>KBOH</b> No-till cultivator hydraulically folding	44
<b>PLOUGHING</b>	
<b>PD</b> Chisel plough	48
<b>POB</b> Rotary plough	50
<b>PZG</b> Bed plough	52
<b>ROLLERS</b>	
<b>WPH</b> Sowing roller hydraulically folding	56
<b>WDF/WDFH</b> Cultivating front roller	58
<b>WFC</b> Roller front campbell	60
<b>WNC</b> Knife roller - cutter	62
<b>WNCF</b> Knife roller - cutter tandem front	64
Configuration of individual rollers	66
Prices for each shaft configured with the machine	68

All pictures in this directory are for reference and may vary from actual products  
The weights indicated [kg] are approximate and may vary from actual  
Power demand shown [HP] are approximate and may vary from actual  
Podane ceny są cenami netto należy doliczyć do nich podatek VAT + 23%.



## CULTIVATION

<b>AUT</b> Cultivator	6
<b>AUTH</b> Cultivator with hydropack	8
<b>AUTW</b> Cultivator/seed drill, including tyre and transport roller	10
<b>BTW</b> Disc harrow for vineyards	12
<b>BTM</b> Disc harrow mini	14
<b>BT</b> Disc harrow	16
<b>BTHL</b> Hydraulic disc harrow, light folding	18
<b>BTHC</b> Hydraulic disc harrow, heavy folding	20
<b>BCC/BCCH</b> Hard/hydraulically folding Cross-Cutter harrow	22
<b>GB</b> Subsoiler	24
<b>GBI</b> Subsoiler with the option of aggregation of a second machine	26
<b>AUS</b> Cultivator/seed drill	28
<b>AUH</b> Hydraulically folding cultivator	30
<b>AUF/AUFH</b> Hard/hydraulically folding cultivator front	32
<b>BMH</b> Mulch harrow	34





Standard equipment:

- two rows of discs Ø 510/560 mm
- dampers
- rigid side screens
- tubular, string or string-toothed roller Ø 500 mm
- powder painting
- 75 cm spacing between plate rows
- maintenance hub
- front linkage beam

Width [m]	2.5		2.7		3.0		3.5		4.0	
Weight [kg]	1030		1150		1290		1550		1770	
Number of discs / hubs	20		22		24		28		32	
Power demand [HP]	60÷90		80÷120		90÷130		110÷160		120÷180	
Disc diameter [mm]	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560
Net PRICE:	5 600 €	5 900 €	6 000 €	6 650 €	6 700 €	7 000 €	7 100 €	7 400 €	8 500 €	8 900 €
Options:										
Ø 610 discs with a maintenance-free hub only included in the package	1 300 €		1 500 €		1 700 €		1 900 €		2 200 €	
Hydraulic regulation of rear roller	350 €									
Lighting	250 €									
Floating side screens	250 €									
Row of scrapers	600 €		650 €		700 €		750 €		800 €	
Wzh trolley 1-axle, 2 wheels 300 mm wide + drawbar	3 900 €									
Hydropack under the seed drill	650 €									
Mount crops spreader	250 €									
Configuration of the rollers is on page 68										

Standard equipment:



Additional equipment:





Standard equipment:

- two rows of discs Ø 510/560 mm
- hydropack under the seed drill
- dampers
- rigid side screens
- tubular, string or string-toothed roller Ø 500 mm (excluding double rollers)
- powder painting
- 75 cm spacing between plate rows
- maintenance hub
- front linkage beam

Width [m]	2.5		2.7		3.0		3.5		4.0	
Weight [kg]	1 100		1 220		1 360		1 660		1 840	
Number of discs / hubs	20		22		24		28		32	
Power demand [HP]	60÷90		80÷120		90÷130		110÷160		120÷180	
Disc diameter [mm]	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560
Net PRICE:	6 250 €	6 600 €	6 550 €	6 800 €	6 950 €	7 300 €	7 600 €	8 200 €	9 100 €	9 950 €

Options:					
Ø 610 discs with a maintenance-free hub only included in the package	1 300 €	1 500 €	1 700 €	1 900 €	2 200 €
Hydraulic regulation of rear roller	350 €				
Lighting	250 €				
Seeding machine supports	200 €				
2. actuator under the hydropack	200 €				
Floating side screens	250 €				
Mount crops spreader pod hydropack	350 €				

Configuration of the rollers is on page 68

Standard equipment:



hydropack under the seed drill



dampers



rigid side screens



maintenance-free hub



front linkage beam

Additional equipment:



Ø 610 disc



hydraulic regulation of roller



lighting



stabilize under the planter wheel



2 actuator under the hydropack



floating side screens



mount crops spreader under the hydropack



Standard equipment:

- two rows of discs Ø 510 / 560 mm
- hydropack under the seed drill on two cylinders
- dampers
- rigid side screens
- powder painting
- 75 cm spacing between plate rows
- maintenance hub
- drawbar na Front three-point linkage
- tyre, seed drill and transport roller

Width [m]	2.5		2.7		3.0		3.5		4.0	
Weight [kg]	1 850		1 980		2 200		2 500		2 900	
Number of discs / hubs	20		22		24		28		32	
Number of wheels	8		8		10		12		14	
Power demand [HP]	60÷90		80÷120		90÷130		110÷150		120÷180	
Disc diameter [mm]	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560	Ø 510	Ø 560
Net PRICE:	10 050 €	10 300 €	10 800 €	11 150 €	12 000 €	12 350 €	13 125 €	13 700 €	15 400 €	16 250 €

Options:							
Ø 610 discs with a maintenance-free hub only included in the package	1 300 €		1 450 €		1 700 €	1 900 €	2 200 €
Floating side screens	250 €						
Lighting	250 €						
Mount crops spreader pod hydropack	350 €						
Stabilize under the planter wheel	250 €						
Configuration of the rollers is on page 68							

Standard equipment:



transportation drawbar



hydropack under the seed drill on two cylinders



dampers



rigid side screens



maintenance-free hub



tyre, seed drill and transport roller

Additional equipment:



Ø 610 disc



floating side screens



lighting



mount crops spreader under the hydropack



stabilize under the planter wheel



Standard equipment:

- two rows of discs Ø 510 / 560 mm
- tubular, string or string-toothed roller Ø 500 mm (excluding double rollers)
- dampers
- rigid side screens
- powder painting
- 85 cm spacing between plate rows
- maintenance hub
- latch Front three-point linkage pin 1/2 cat.
- system of reeversed discs with the task increasing the working width relative to the actual working width, which is very important in fairly narrow cultures and plantations.

The machine can be configured with any available roller as in a disc harrow excluding the double rollers.

Width [m]	1.0		1.25		1.5		1.75		2.0	
The actual width [m]	1.1		1.35		1.6		1.85		2.1	
Weight [kg]	560		640		720		780		840	
Number of discs / hubs	8		10		12		14		16	
Power demand [HP]	25÷45		30÷50		40÷60		45÷65		55÷75	
Disc diameter [mm]	510	560	510	560	510	560	510	560	510	560
Net PRICE:	3 000 €	3 100 €	3 150 €	3 300 €	3 450 €	3 600 €	3 700 €	3 850 €	4 000 €	4 150 €

Options:	
Hydraulic regulation of rear roller	250 €
250 mm gooseneck coulter	100 € item Max 3 pcs.
Floating side screens	250 €
Cylinder for lifting the machine	250 €
Lighting	250 €
Configuration of the rollers is on page 68	

Standard equipment:



dampers



rigid side screens



maintenance-free hub



a two-step cogging pin

Additional equipment:



hydraulic regulation of rear roller



250 mm gooseneck coulter



floating side screens



cylinder for lifting the machine



lighting



### Standard equipment:

- two rows of discs Ø 460 / Ø 510 mm
- tubular, string or string-toothed roller Ø 500 mm (excluding double rollers)
- dampers
- rigid side screens
- powder painting
- 85 cm spacing between plate rows
- maintenance hub
- latch Front three-point linkage pin 1/2 cat.

The machine can be configured with any available roller as in a disc harrow excluding the double rollers.

Width [m]	1.0		1.25		1.5		1.75		2.0	
Weight [kg]	560		640		720		780		840	
Number of discs / hubs	8		10		12		14		16	
Power demand [HP]	25÷45		30÷50		40÷60		45÷65		55÷75	
Disc diameter [mm]	460	510	460	510	460	510	460	510	460	510
Net PRICE:	3 000 €	3 100 €	3 150 €	3 300 €	3 450 €	3 600 €	3 700 €	3 850 €	4 000 €	4 150 €

Options:	
Hydraulic regulation of rear roller	250 €
250 mm gooseneck coulter	100 € item Max 3 pcs.
Floating side screens	250 €
Cylinder for lifting the machine	250 €
Lighting	250 €
Disc Ø 560 mm	15 € item 1 pcs.
Configuration of the rollers is on page 68	

### Standard equipment:



dampers



rigid side screens



maintenance-free hub



a two-step cogging pin

### Additional equipment:



hydraulic regulation of rear roller



250 mm gooseneck coulter



floating side screens



cylinder for lifting the machine



lighting



disc Ø 560 mm



### Standard equipment:

- dwa rzędy talerzy Ø560 mm
- amortyzatory gumowe
- wał rurowy, strunowy lub strunowy zębaty Ø 500 mm
- ekrany boczne sztywne
- malowanie proszkowe
- rozstaw między rzędami talerzy 100 cm
- piasta obsługowa
- zaczep TUZ na belkę

Width [m]	2.5	2.7	3.0	3.5	4.0
Weight [kg]	1 150	1 250	1 380	1 580	1 900
Number of discs / hubs	20	22	24	28	32
Power demand [HP]	60÷90	75÷110	80÷110	90÷120	100÷130
Net PRICE:	6 050 €	6 550 €	6 850 €	8 100 €	9 450 €
Options:					
Ø 610 discs with a maintenance-free hub only included in the package	1 300 €	1 450 €	1 700 €	1 900 €	2 250 €
Hydraulic regulation of rear roller	350 €				
Row of scrapers	600 €	650 €	700 €	750 €	800 €
Floating side screens	250 €				
Latch Front three-point linkage pin 2/3 cat.	125 €				
Lighting	250 €				
Wzh trolley 1-axle, 2 wheels 300 mm wide + drawbar	3 900 €				
Mount crops spreader	250 €				
Configuration of the rollers is on page 68					

### Standard equipment:



dampers



rigid side screens



maintenance-free hub



latch Front three-point linkage pin

### Additional equipment:



disc Ø 560 mm



hydraulic regulation of roller



row of scrapers before/behind the roller



floating side screens



latch Front three-point linkage pin 2/3 cat.



lighting



trolley mounted between discs and roller



mount crops spreader



Standard equipment:

- two rows of discs Ø 510 / Ø 560 mm
- dampers
- rigid side screens
- tubular, string or string-toothed roller Ø 500 mm
- 100 cm spacing between plate rows
- maintenance hub
- latch pin 3 cat.

Excluding: Crosskill roller, Cracker-Disc Roller, Rubber Roller, U-bar roller / T-bar roller / V-ring roller Ø 600 and Double Rollers

Width [m]	4.0H	4.5H	5.0H	6.0H
Weight [kg]	2 350	2 650	2 950	3 550
Number of discs / hubs	32	36	40	48
Power demand [HP]	100÷130	110÷150	145÷180	180÷220
Net PRICE:	12 100 €	13 200 €	14 700 €	17 000 €
Options:				
Row of scrapers	750 €	1 125 €	1 450 €	1 700 €
Hydraulic regulation of rear roller	1 100 €			
Floating side screens	250 €			
Wzh trolley 1-axle, 2 wheels 300 mm wide + drawbar	3 900 €			
Wheels 400 mm wide	600 €			
Pneumatic brake	2 400 €			
Lighting	350 €			
Configuration of the rollers is on page 68				

Standard equipment:



Additional equipment:





### Standard equipment:

- two rows of discs Ø560 mm
- triangular dampers 50 mm x 190 mm
- tubular, string or string-toothed roller Ø 500 mm (excluding double rollers)
- rigid side screens
- clearance between the disc and the frame increased by 12 cm
- 100 cm spacing between plate rows
- space for the cultivation roller increased by 20 cm
- discs mounted on profile beam 90mm/90mm
- mechanical locking of the wings
- powder painting



triangular dampers



rigid side screens



maintenance-free hub



disc Ø 560 mm

Width [m]	4.0HH	4.5HH	5.0HH	6.0HH	8.0HH
Weight [kg]	3 050	3 500	3 850	4 650	6 250
Number of discs / hubs	32	36	40	48	64
Power demand [HP]	130÷160	150÷180	160÷200	180÷260	250<
Net PRICE:	12 650 €	13 900 €	15 900 €	19 100 €	43 700 €

Options:					
Ø 610 discs with a maintenance-free hub only included in the package	2 200 €	2 500 €	2 800 €	3 200 €	at the basic price
Row of scrapers	800 €	1 200 €	1 600 €	2 200 €	3 000 €
Hydraulic regulation of rear roller			1 100 €		
Floating side screens			250 €		
Wzh trolley 1-axle, 2 wheels 400 mm + drawbar			3 850 €		
Wzh trolley 1-axle, 2 wheels 400 mm + drawbar, <b>mounted between discs and roller</b>			4 850 €		
Wzh trolley 1-axle, 2 wheels 400 mm + drawbar + <b>hydropack</b>			5 250 €		
Wheels 500 mm wide			800 €		
Pneumatic brake			2 400 €		
Support wheels 2x2			1 200 €		
Mount crops spreader under the hydropack for semi-mounted harrow with a trolley			350 €		
Mount crops spreader under the hydropack for mounted harrow without a trolley			450 €		
Separator of the crop residue			900 €		
Drawbar for lower eye hitch + cylinder			1 100 €		
Drawbar for lower ball hitch + cylinder			1 200 €		
Mudguards (only trolley after the roller)			300 €		
Lighting			350 €		
Configuration of the rollers is on page 68					

### Additional equipment:



disc Ø 610 mm



row of scrapers before/behind the roller



hydraulic regulation of roller



floating side screens



trolley after the roller



trolley between discs and roller



trolley after the roller with hydropack



wheels 500 mm wide



pneumatic brake



crops spreader under the hydropack for semi-mounted harrow with a trolley



mudguards (only trolley after the roller)



separator of the crop residue



lighting



Standard equipment:

- two rows of discs Ø 450 mm cross cutter type
- tubular, string or string-toothed roller Ø 500 mm
- powder painting
- 100 cm spacing between plate rows
- maintenance-free hub
- a two-stage Front three-point linkage 2/3 cat.

The Cross Cutter harrow is suitable for shallow tillage and also for undercutting the crop. By using shallow crop, we reduce the evaporation of water from the soil. The machine is designed for fast and economical cultivation. The maximum operating speed is 20 km/h and the working depth is 4 cm.

Width [m]	2.5	3.0	3.5	4.0	4.0 H	4.5 H	5.0 H	6.0 H
Weight [kg]	1 220	1 360	1 660	1 840	2 400	2 700	3 000	3 600
Number of discs / hubs	20	24	28	32	32	36	40	48
Power demand [HP]	80÷120	90÷130	110÷160	120÷180	130÷160	150÷180	160÷200	180÷260
Net PRICE:	7 700 €	9 200 €	10 200 €	11 400 €	14 400 €	15 200 €	15 900 €	18 200 €
Options:								
Row of scrapers	575 €	600 €	670 €	710 €	750 €	1 150 €	1 375 €	1 650 €
Hydraulic regulation of rear roller	350 €				1 100 €			
Floating side screens	250 €							
Wzh trolley 1-axle, 2 wheels 300 mm wide + drawbar	only available in the BCCH				3 900 €			
Wheels 400 mm wide					600 €			
Pneumatic brake					2 400 €			
Lighting	240 €				350 €			
Configuration of the rollers is on page 68								

Standard equipment:



maintenance-free hub



latch Front three-point linkage  
pin 2/3 cat.

Additional equipment:



row of scrapers before/behind  
the roller



hydraulic regulation of roller



floating side screens



trolley after the roller



wheels 400 mm wide



pneumatic brake



lighting



Standard equipment:

- screw protection or Non-Stop protection (double spring)
- frame height 90 cm
- support feet
- removable chisels
- support wheels 10/80-12

Width [m]	3.0		4.0	
Weight [kg]	1 150	1 300	1 400	1 550
Teeth count	4	6	6	8
Power demand [HP]	130÷150	150÷170	150÷170	160÷190
Rip(bolt) protection Net PRICE:	5 650 €	6 350 €	8 300 €	8 650 €
NON-STOP protection (spring) Net PRICE:	6 900 €	7 950 €	10 300 €	10 700 €
Options:				
Double Spiny roller	1 200 €		1 550 €	
Lighting	250 €			
Configuration of the rollers is on page 68				

Standard equipment:



screw protection



spring protection



support feet



chisel and grim guards



support wheels 10/80-12

Additional equipment:



lighting



double Spiny roller with hydraulic adjustment






Standard equipment:

- Non-Stop protection (double spring)
- frame height 90 cm
- support feet
- removable chisels
- possibility of attaching accompanying machines



Width [m]	3.0	
Security	Non Stop	Non Stop
Number of work items	4 pcs.	6 pcs.
Montage	front-rear	front-rear
Additional Front three-point linkage; possibility of attaching accompanying machines at rear assembly		
Weight [kg]	1 350 kg	1 550 kg
Power demand [HP]	140 KM<	180 KM<
Lighting	250 €	
Net PRICE:	8 050 €	9 100 €

Standard equipment:

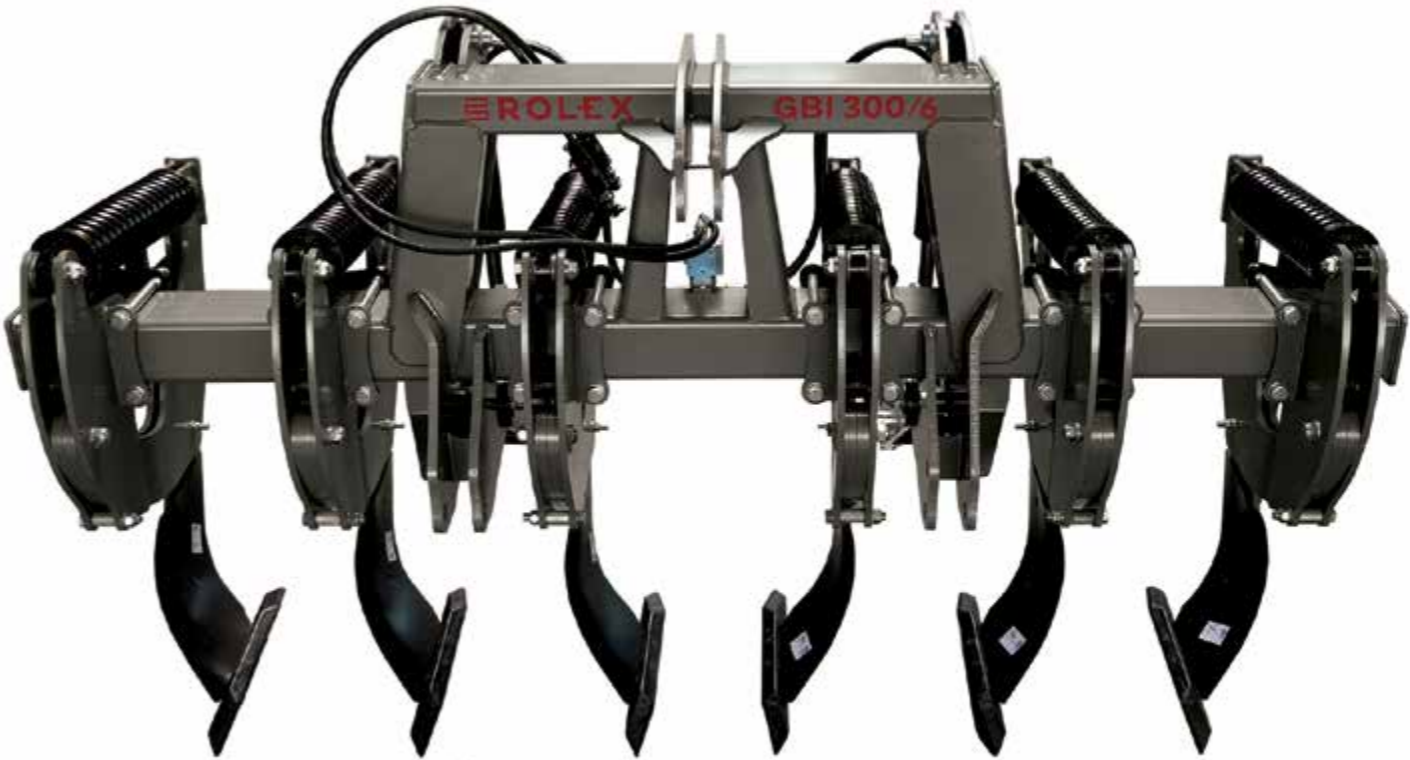



Standard equipment:

- two rows of teeth
- hydropack on two actuators
- tubular, string or string-toothed roller Ø 500 mm (excluding double rollers)
- front string roller
- powder painting



Width [m]	2.5	2.7	3.0
Weight [kg]	740	800	860
Teeth count	18	20	22
Power demand [HP]	70÷90	90÷100	90÷110
Net PRICE:	3 850 €	3 900 €	4 050 €

Options:		
Third row of teeth		200 €
Stabilize under the planter wheel		250 €
Lighting		200 €
Configuration of the rollers is on page 68		

Standard equipment:



two rows of teeth



hydropack on two actuators

Additional equipment:




Third row of teeth



lighting




stabilize under the planter wheel

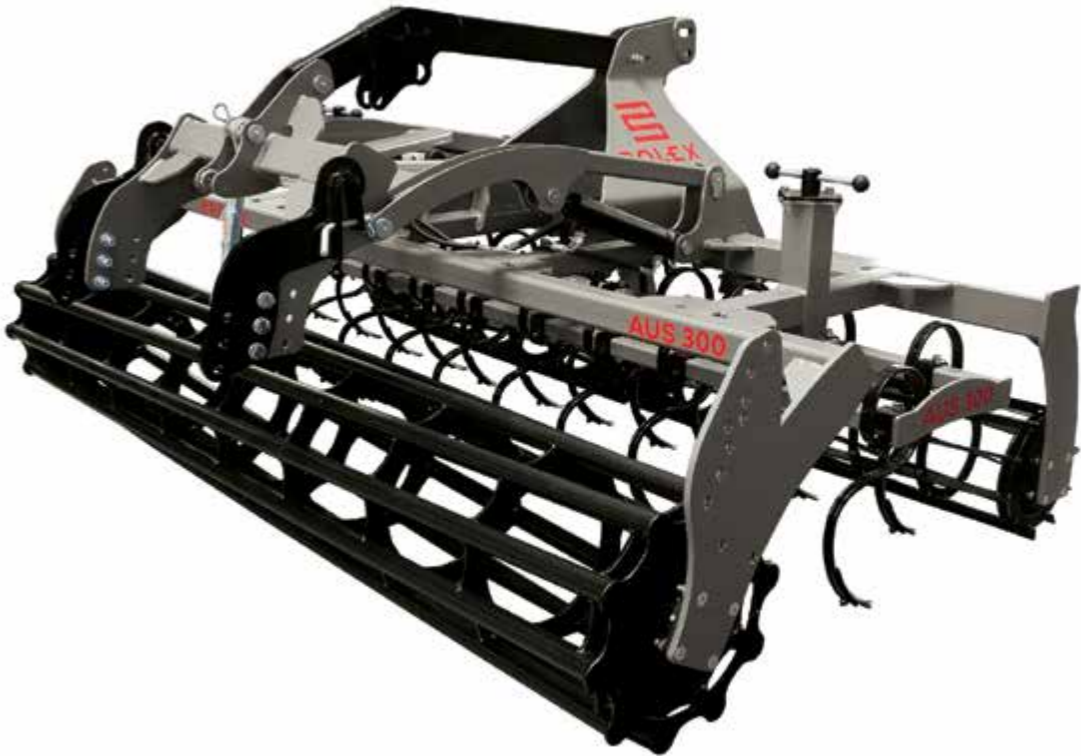



Standard equipment:


- smooth front string roller
- four rows of 32x12 tines
- two rows of rear string rollers with tines
- wheel track eradicator
- dampers of the rear rollers

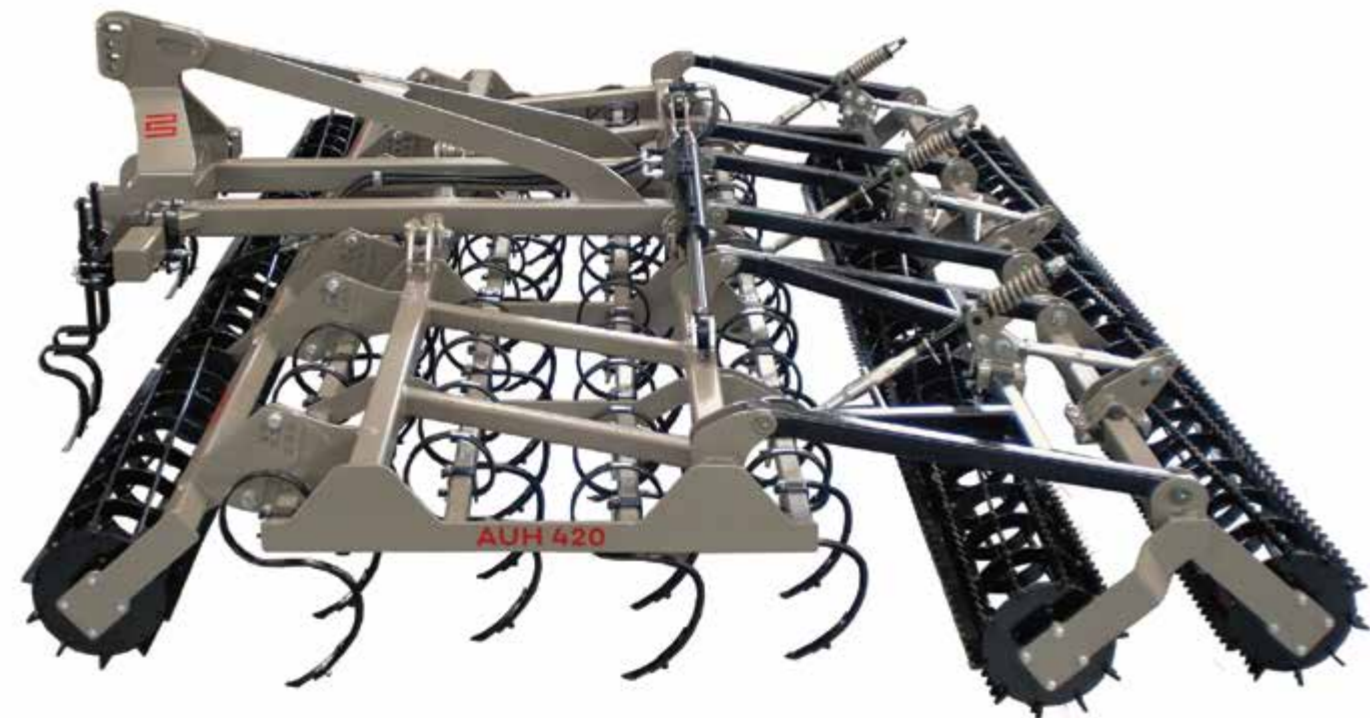


Width [m]	3.6	4.2	5.0	5.6
Weight [kg]	1 550	1 680	1 820	1 980
Teeth count	36	42	50	56
Power demand [HP]	95÷130	120÷150	150÷180	160<
Net PRICE:	6 250 €	6 900 €	8 650 €	9 450 €

Options:			
II wheel track eradicator	150 €	at the basic price	
Tooth reinforcement		25 € / item	
„Goose feet“ tines width 100mm (tooth reinforcement is mandatory)		15 € / item	
Lighting		250 €	

Standard equipment:

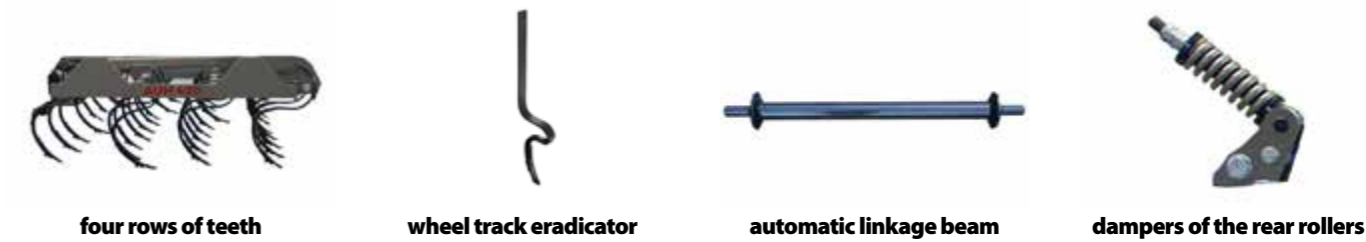


Additional equipment:

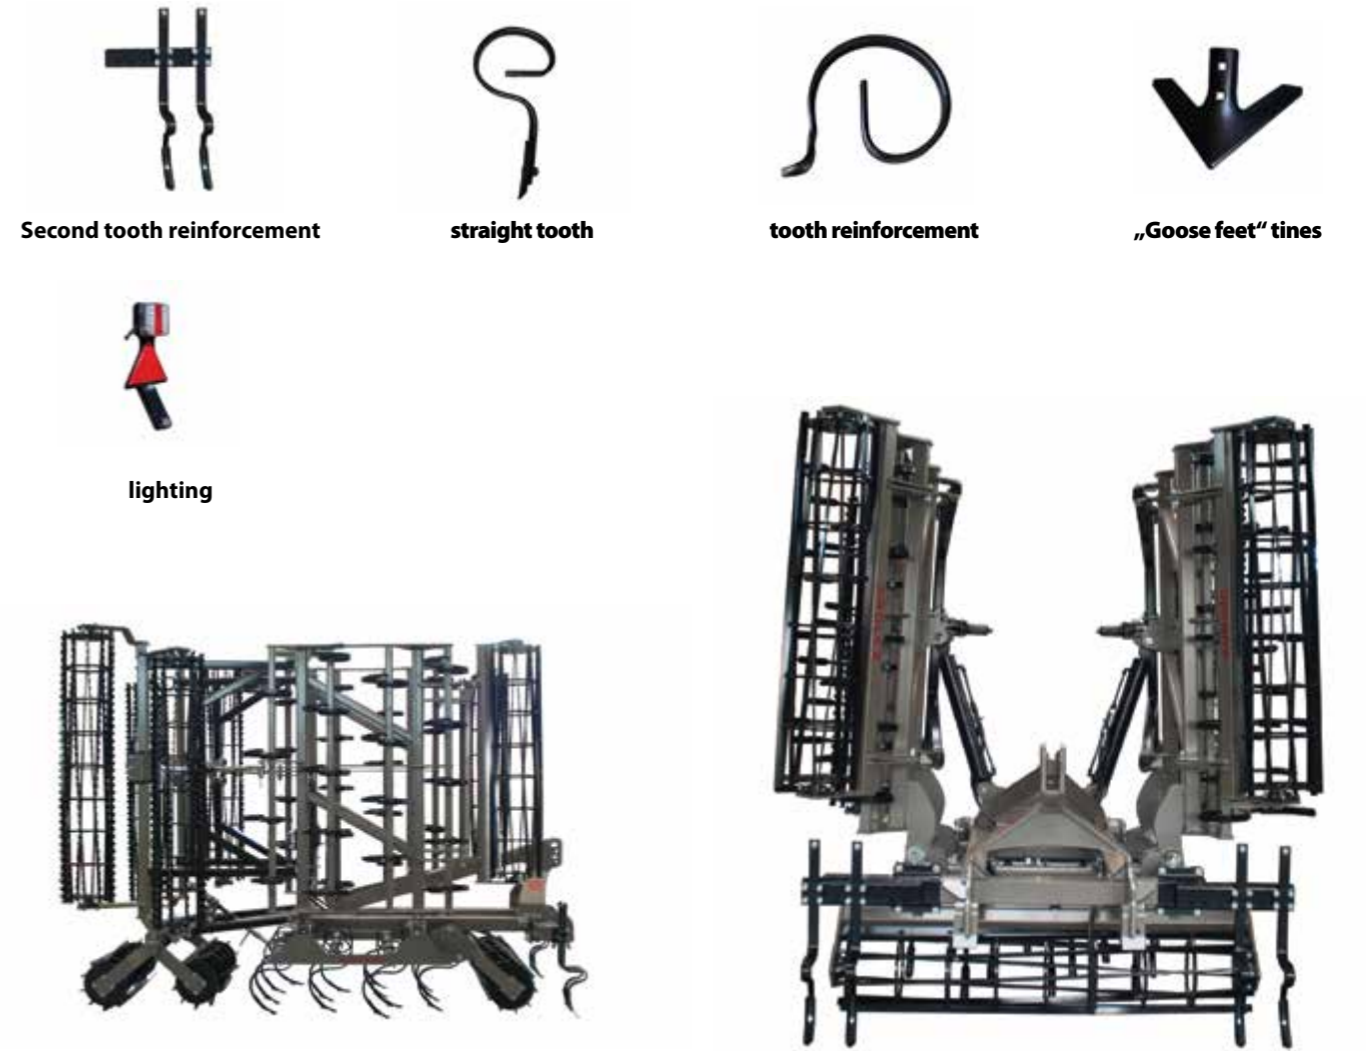

# AUF/AUFH

Hard/hydraulically folding  
cultivator front

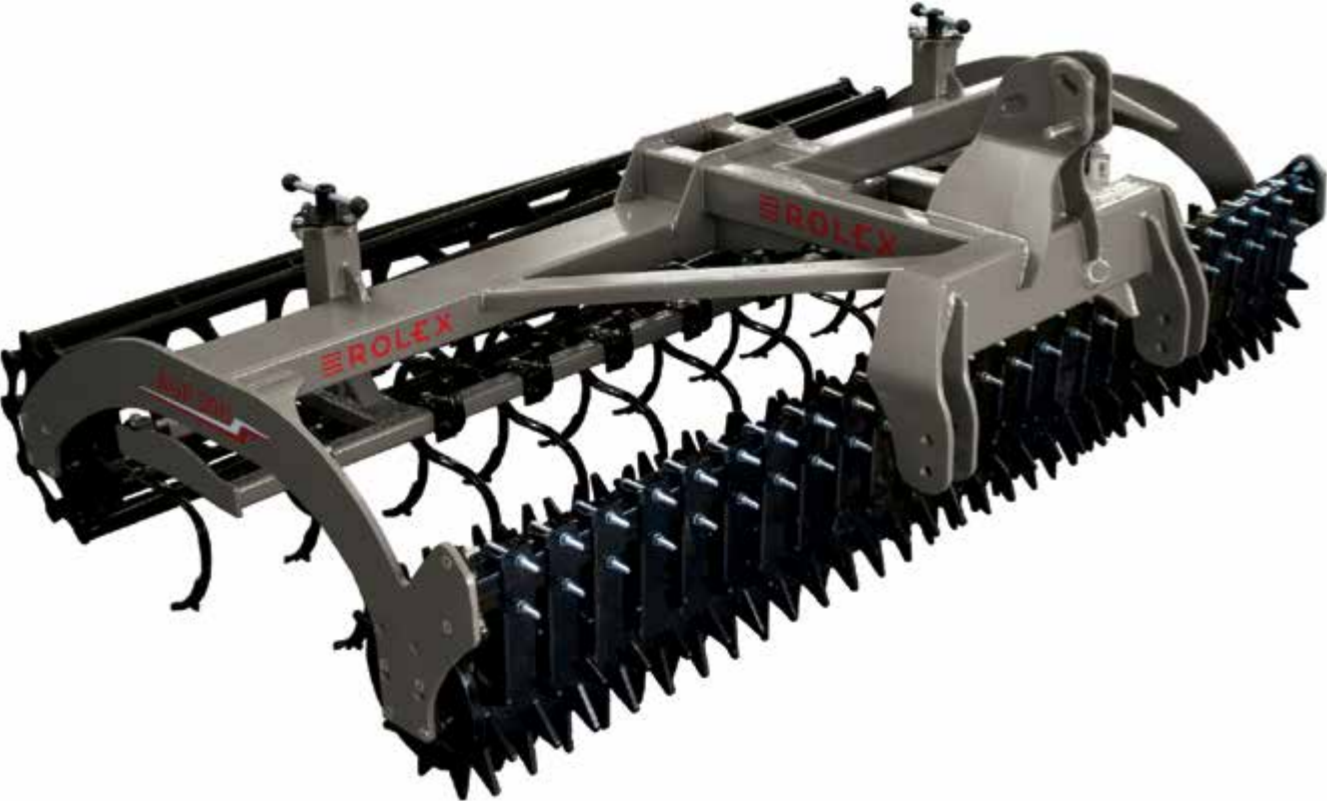

Cultivator can be mounted on the front Front three-point linkage.

- two rollers (optional)
- two rows of 32/10 springy tines

Cultivator effectively compacts plowed soil, crushing lumps, condensing after ploughing.  
Different configuration of the rollers in accordance with the price list, excl. rollers above Ø 500mm.



Width [m]	3.0	4.0	4.5	5.0	6.0
Weight [kg]	980	1 500	1 690	1 880	2 060
Teeth count	22	32	36	40	48
Tube - tube, string - string, tube - string	5 000 €	7 150 €	7 850 €	8 650 €	10 750 €
Options:					
Lighting	350 €				
Configuration of the rollers is on page 68					

Standard equipment:



two rows of teeth



two rows of the rollers

Additional equipment:



lighting



straight tooth




tooth reinforcement



„Goose feet“ tines



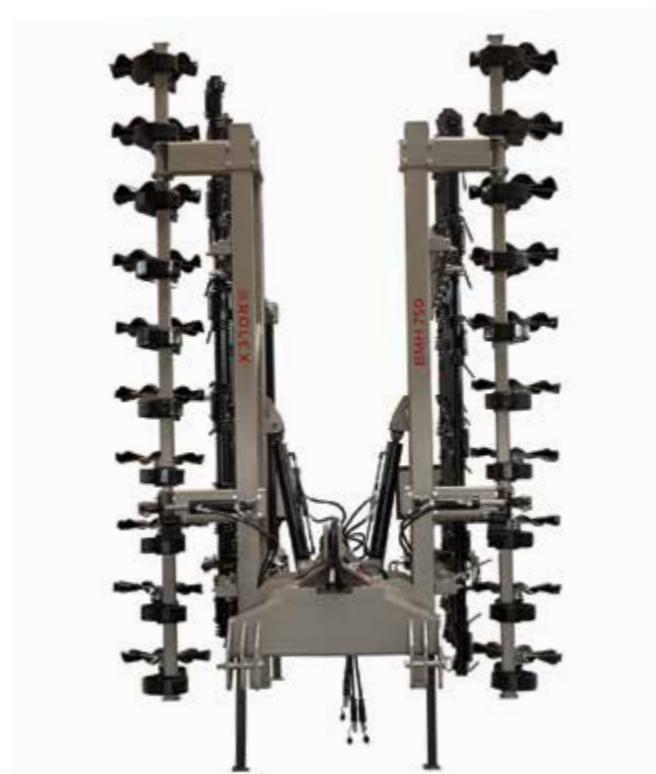

### Standard equipment:

- Five rows of harrow springs Ø 16 with a length of 710 cm
- spring mounting pipe 70 mm in diameter
- hydraulic adjustment of the harrow springs

### The most important use of the mulch harrow is in stubble cultivation.

It ensures the destruction of shallow-rooted weeds and volunteer seeds.

The mulch harrow perfectly levels the field and rakes out harvest residues while providing a shallow cover for catch crops. The harrow is used for field preparation in reduced tillage or direct seeding.

This machine also helps with grassland maintenance and provides raking and shredding of plant residues, cutting of the turf, partial destruction of weeds, and levelling of molehills.



Width [m]	3.0	5.0	6.2	7.5
Weight [kg]	700	1 300	2 000	2 150
Number of springs	25	40	50	60
Power demand [HP]	55÷80	85÷115	110÷150	125÷180
Net PRICE:	4 900 €	11 000 €	11 700 €	12 350 €

Options:				
520 mm row of wave-shaped cutting discs with hydraulic depth adjustment, maintenance-free hubs,	1 750 €	3 150 €	3 450 €	3 750 €
hydraulic adjustable front drag with springs 80x10cm	1 500 €	2 200 €	2 300 €	2 500 €
Lighting	350 €			
Mount crops spreader	250 €			

### Standard equipment:



five rows of harrow springs



hydraulic adjustment of the harrow springs

### Additional equipment:



row of wave-shaped cutting discs



hydraulic adjustable front drag with springs



lighting



mount crops spreader





#### STUBBLE CULTIVATION

<b>APG</b> Gruber stubble cultivator	38
<b>KBO</b> No-till cultivator	40
<b>KBOH</b> No-till cultivator hydraulically folding	42





Standard equipment:

- two rows of teeth
- row of scraper discs
- tube or smooth string roller Ø 500 mm (excluding Double Rollers)
- worm protection, Non-Stop protection (double spring), screw protection
- powder painting



Width [m]		1,8	2.2	2.6	3.0
Weight [kg]		760	860	940	1 020
Teeth count		4	5	6	7
Number of discs / hubs in one row		5	6	7	8
Number of discs / hubs in two rows		8	10	12	14
Power demand [HP]		60:80	80÷100	90÷110	120÷140
Standard worm protection (*) only with Vogel&Noote working parts Net PRICE:		3 350 €	3 750 €	4 650 €	5 000 €
NON-STOP protection (spring)** Net PRICE:	Lemken working parts	4 850 €	5 400 €	6 100 €	7 000 €
	Vogel&Noote working parts	4 650 €	5 300 €	6 000 €	6 650 €
Rip(bolt)*** protection Net PRICE:	Lemken working parts	3 400 €	4 250 €	4 650 €	5 000 €
	Vogel&Noote working parts	3 150 €	3 550 €	4 300 €	4 700 €
Options:					
Two rows of discs		600 €	700 €	800 €	900 €
Hydraulic regulation of rear roller		350 €			
Lighting		250 €			
Configuration of the rollers is on page 68					

Standard equipment:



Additional equipment:





### Standard equipment:

- spring protection, screw protection
- three rows of tines with cutters „Delta Flex” Kongskilde type
- row of scraping discs
- rear tubular or string roller Ø 500 mm



\* Multi-purpose, modular, non-tillage cultivator

Width [m]	2.6	3.0	3.5	4.0
Weight [kg]	1 200	1 500	1 750	2 000
Teeth count	9	11	12	14
Number of discs / hubs in one row	7	8	9	10
Number of discs / hubs in two rows	12	14	16	16
Power demand [HP]	110÷130	130÷160	150÷180	160÷200
NON-STOP protection (spring) Net PRICE:	8 000 €	9 000 €	10 500 €	11 700 €
Rip(bolt) protection Net PRICE:	7 550 €	8 650 €	10 200 €	11 300 €

Options:				
Hydraulic regulation of rear roller	350 €			
Two rows of discs	800 €	900 €	1 000 €	1 100 €
Mount crops spreader	250 €			
Tine with working parts Horsch type	25 € / item			
Padded chisel „Delta Flex” type	45 €			
Strengthened chisel „Delta Flex” type	70 €			
Lighting	250 €			
Wzh trolley 1-axle, 2 wheels 300 mm wide + drawbar	3 900 €			
Tyre and transport roller	3 900 €			
Configuration of the rollers is on page 68				



double spring in Non-Stop protection



screw protection



three rows of tines with cutters



row of scraper discs

### Additional equipment:



hydraulic regulation of roller



discs / hubs in two rows



tine with working parts Horsch type



hydraulic adjustment of discs



padded chisel „Delta Flex” type



strengthened chisel „Delta Flex” type




lighting



trolley mounted between discs and roller




Tyre and transport roller \*\*

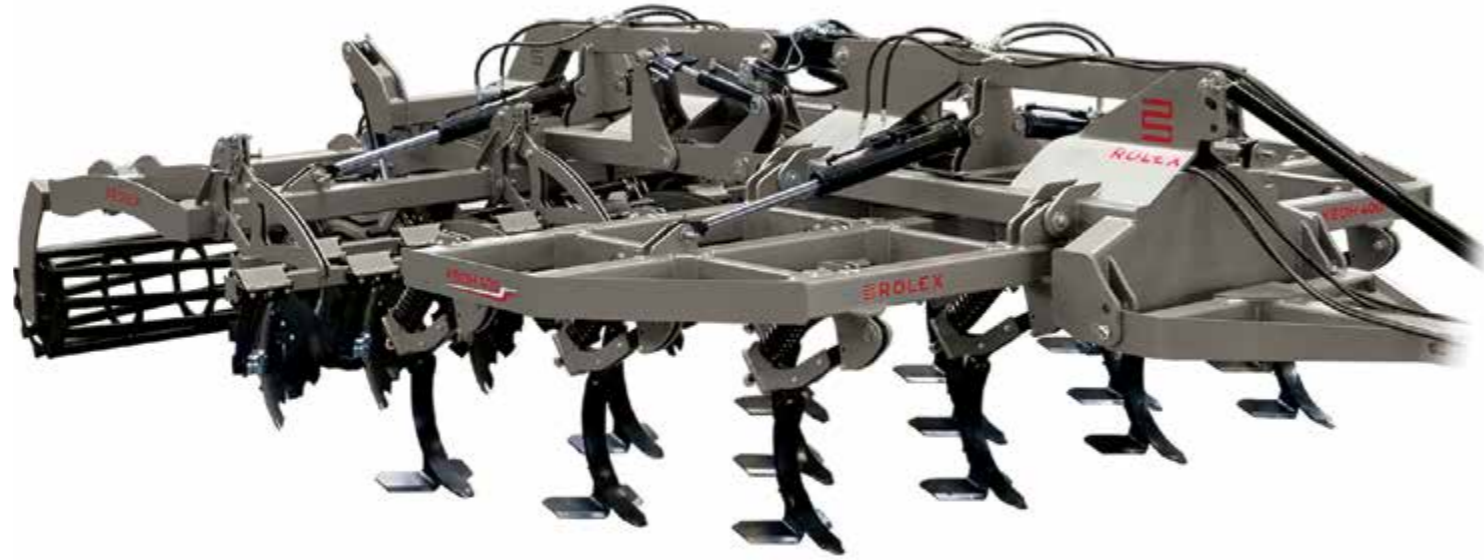

### Standard equipment:

- spring protection, screw protection
- three rows of tines with cutters „Delta Flex” Kongskilde type
- row of scraping discs
- rear tubular, string or string-toothed roller Ø500 mm
- hydraulic rear roller adjustment

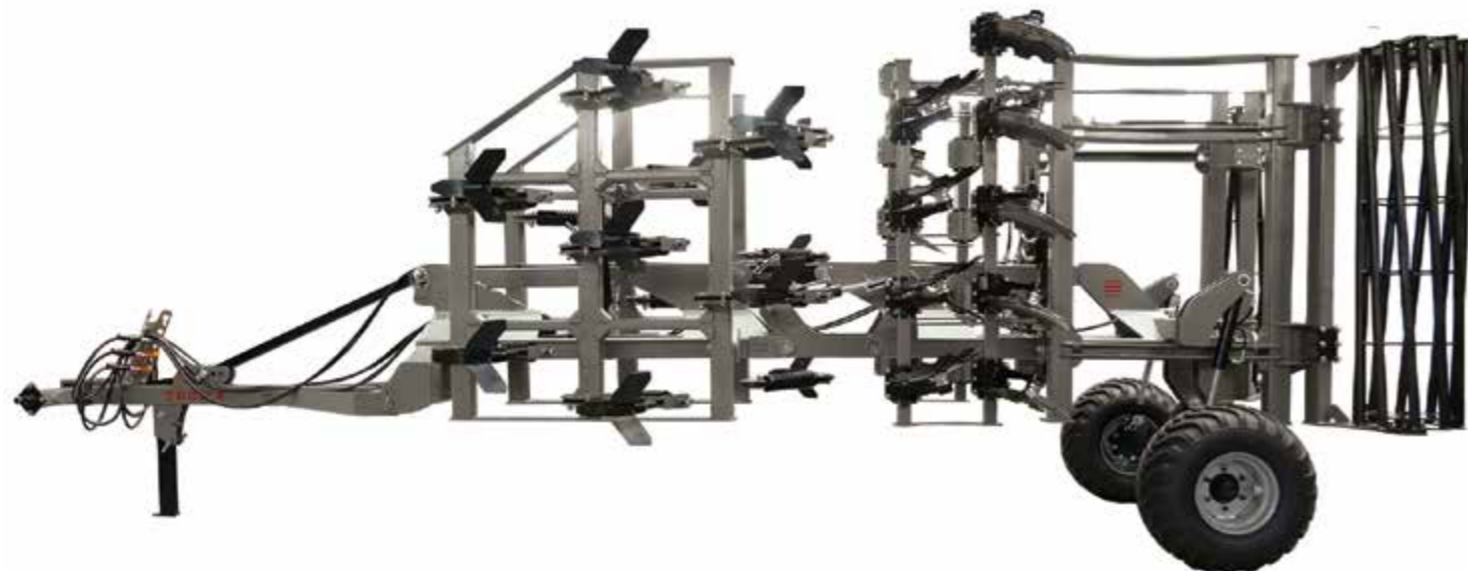

Width [m]	4.0 H	5.0 H
Weight [kg]	4 500	5 200
Teeth count	14	18
Number of discs / hubs in one row	11	12
Number of discs / hubs in two rows	18	22
Power demand [HP]	200÷250	250÷300
NON-STOP protection (spring) Net PRICE:	15 750 €	19 500 €
Rip(bolt) protection Net PRICE:	15 200 €	18 800 €

Options:		
Two rows of discs	1 100 €	1 400 €
Wzh trolley 1-axle, 2 wheels 400 mm + drawbar	3 900 €	
Drawbar for lower ball hitch + cylinder	1 200 €	
Drawbar for lower eye hitch + cylinder	1 050 €	
Tine with working parts Horsch type	25 € / item	
Padded chisel	45 €	
Strengthened chisel	70 €	
Lighting	350 €	
Configuration of the rollers is on page 68		

### Standard equipment:



double spring in Non-Stop protection



screw protection



three rows of tines with cutters



row of scraper discs



maintenance-free hub

### Additional equipment:



discs / hubs in two rows



Wzh trolley 1-axle, 2 wheels 400 mm, drawbar



ball hitch



eye hitch



tine with working parts Horsch type



padded chisel „Delta Flex” type



strengthened chisel „Delta Flex” type



support wheels



lighting



## PLOUGHING

- PD** Chisel plough
- POB** Rotary plough
- PZG** Bed plough

46  
48  
50





The chisel plough manufactured by our company can work as deep as 60 cm down, which facilitates loosening of the subsoil.

This operation improves the ability of water to soak through and soil aeration, invigorating the soil and making the plants grow faster. Specially designed shape of teeth of the plough allows simultaneous tilth of the topsoil and mixing of crop residues.

#### Standard equipment:

- hydraulic or screw protection
- teeth with expendable operating elements, smooth adjustment of roller working depth
- tandem (double) spike roller with hydraulic depth adjustment



Width [m]	2,5	3,0
Weight [kg]	1 900	2 400
Teeth count	5	7
Power demand [HP]	160÷200	200÷250
Net PRICE with hydraulic protection:	14 300 €	16 700 €
Net PRICE with screw protection:	10 000 €	11 500 €
Options:		
Floating side screens	250 €	
Lighting	350 €	

#### Standard equipment:



hydraulic protection



screw protection



hydraulic regulation of roller



two rows of tines

#### Additional equipment:




floating side screens



lighting



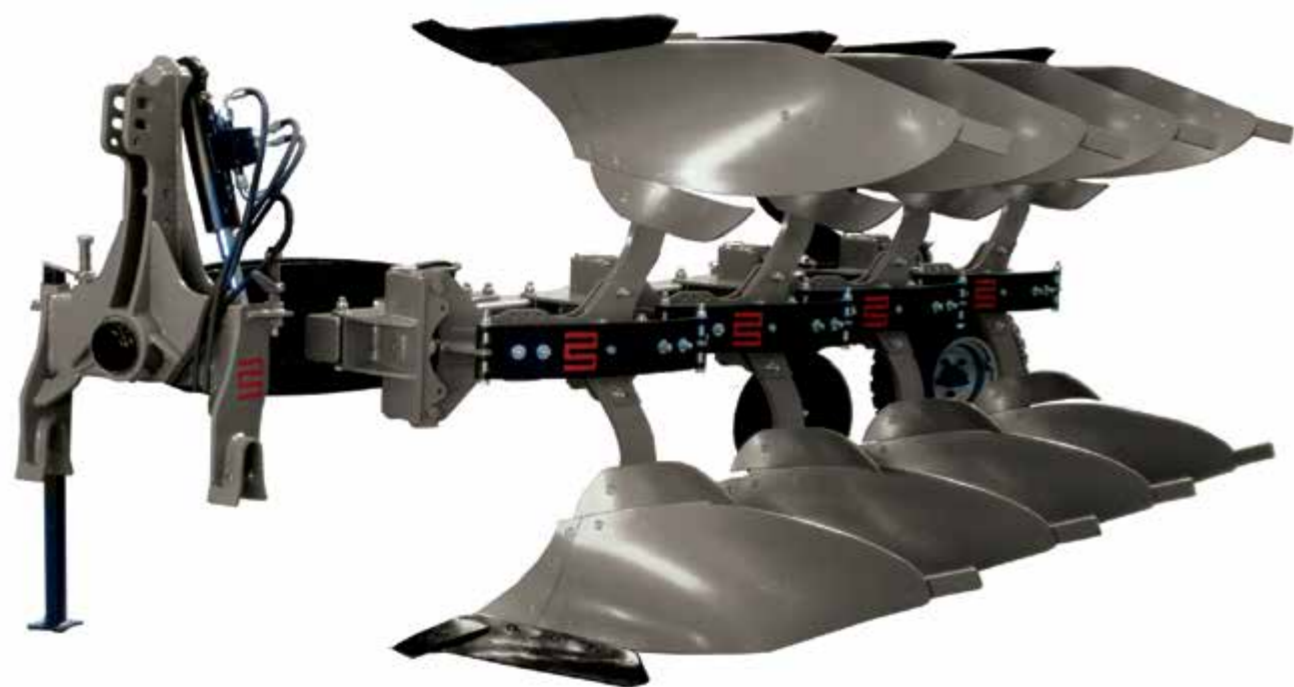

#### Standard equipment:

- 5-leaf spring
- leg spacing: 85 cm
- clearance underneath the frame: 80 cm
- working widths of legs [in cm]: 28-32-36-40-44
- Kverneland 18"-type operating elements
- gauge wheel
- powder painting



#### Non-Stop spring safety system:

Number of bodies	2+1 (3)	3+1 (4)	4+1 (5)
Weight [kg]	900	1 500	2 000
Power demand [HP]	~85	~ 105	~ 125
Net PRICE:	8 750 €	10 350 €	12 650 €

Options:			
Alignment cylinder with memory module		900 €	
Skimmers		1 050 €	
Share		500 €	
7-leaf spring	300 €	400 €	500 €

#### Standard equipment:



Kverneland 18"-type operating elements



gauge wheel

#### Additional equipment:



7-leaf spring



alignment cylinder with memory module



skimmers



share

#### Bolt protection:

Number of bodies	2+1 (3)	3+1 (4)	4+1 (5)
Weight [kg]	800	1 000	1 200
Power demand [HP]	~85	~ 105	~ 125
Net PRICE:	7 850 €	8 650 €	10 600 €

Options:			
Alignment cylinder with memory module		900 €	
Skimmers		1 050 €	
Share		500 €	

#### Additional equipment:



alignment cylinder with memory module



skimmers



share



### Standard equipment:

- screw adjustment of ploughing width, which is equal to:
  - 0.85m-1.25m for 3-furrow ploughs
  - 1.2m-1.7m for 4-furrow ploughs
  - 1.55m-2.35m for 5-furrow ploughs
- clearance underneath the frame: 80 cm,
- plough leg spacing 95 cm
- Kverneland 18"-type operating elements



Number of bodies	3	4	5
Weight [kg]	850	950	1 050
Power demand [HP]	80÷100	90÷120	110÷150
Non-Stop spring safety system	7 850 €	8 650 €	10 600 €
ROTARY plough BOLT PROTECTION	7 850 €	8 650 €	10 600 €

### Equipment:



Spring safety system



screw protection



Kverneland 18"-type operating elements



gauge wheel





**ROLLERS**

<b>WPH</b> Sowing roller hydraulically folding	54
<b>WDF/WDFH</b> Cultivating front roller	56
<b>WFC</b> Roller front campbell	58
<b>WNC</b> Knife roller - cutter	60
<b>WNCF</b> Knife roller - cutter tandem front	62
Configuration of individual rollers	64
Prices for each shaft configured with the machine	66



**Rollers (Cambridge, Croskill)** are used for kneading, crushing, leveling and soil compaction. Pre-sowing embankment can be used on arable land, grassland and peat soils.

- Cambridge Ø 500 - for sowing and grassland.
- Crosskil Ø 500 - designed for crushing lumps in arable fields.

Standard equipment:

- drawbar
- support foot
- three roller sections, hydraulic cylinders, unfolding and folding from the tractor position
- wheels 11.5/80-15.3
- transport securing



Width [m]	4.5	5.4	6.3
Weight [kg]	2 280	2 560	2 860
Power demand [HP]	80÷110	90÷120	110÷150
Cambridge roller Ø 500 - net PRICE	8 550 €	10 250 €	11 500 €
Crosskil roller Ø 500 - net PRICE	8 550 €	10 250 €	11 500 €
Options:			
Front drag with 80x10mm springs	1 950 €	2 200 €	2 450 €
Hydraulic adjustable front drag with 80x10mm springs	2 200 €	2 300 €	2 550 €
Lighting		350 €	
Case for the stones		200 €	
Pneumatic brake		2 400 €	
Eye hitch (support foot mandatory)		200 €	
Rotated support foot		350 €	

Standard equipment:



Additional equipment:



# WDF/WDFH

## Cultivating front roller



**Cultivating Roller Front Roller** can be mounted on the front three-point linkage. Cultivating Roller Front Roller are used for soil compaction, crushing lumps, condensing after ploughing. This cultivating roller works well with cultivator/seed drills. It retains moisture in the soil and improves soil structure.

### Standard equipment:

- support feet
- mechanical locking of the wings (WDFH version)

### Additional equipment:



lighting



hydraulic adjustable front drag with springs



Width [m]	3.0	4.0 H	4.5 H	5.0 H	6.0 H
Weight [kg]	720	960	1 080	1 200	1 450
V-ring diameter 600 mm	2 800 €	5 550 €	5 650 €	5 750 €	7 000 €
Options:					
Lighting	350 €				
Front drag with 80x10mm springs	1 300 €	1 700 €	2 000 €	2 100 €	2 300 €
Hydraulic adjustable front drag with 80x10mm springs	1 450 €	1 900 €	2 100 €	2 300 €	2 450 €






Cultivating Roller Cambell can be mounted on the front three-point linkage. Cultivating Roller Cambell thanks to its design, is built into the soil to be cultivated, allowing the fine breaking of large masses of soil solids. This roller is ideal for use in late cereal sowing.

Standard equipment:

- 700 mm cast iron rings
- ring cleaning chains
- ground followings mechanism

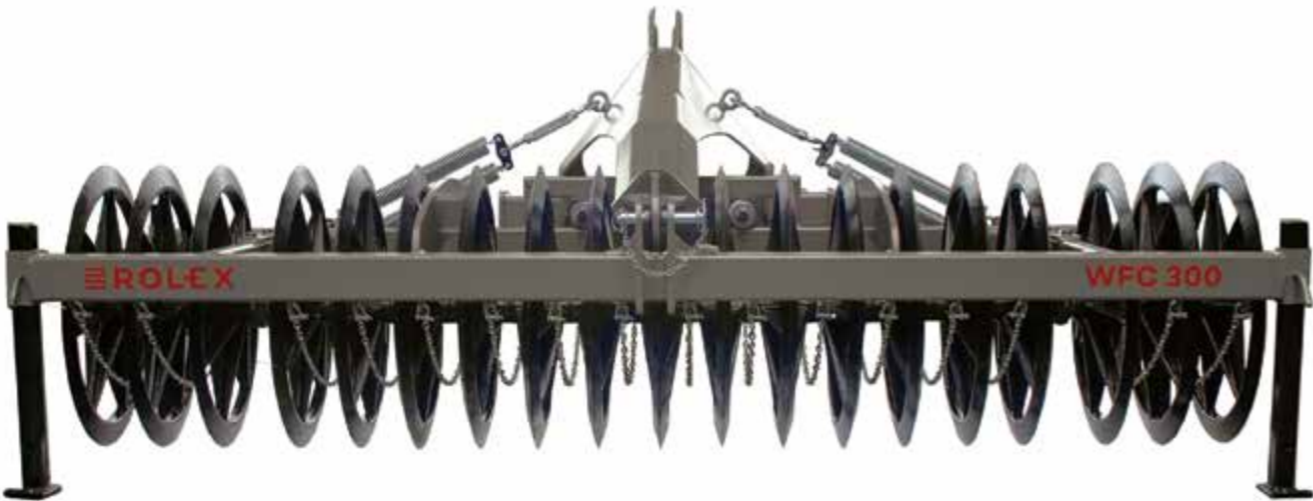

Width [m]	3.0
Roller diameter	700
Power demand [HP]	40
Net PRICE:	4 500 €
Options:	
Lighting	350 €
Front drag with 80x10mm springs	1 300 €
Hydraulic adjustable front drag with 80x10mm springs	1 450 €
Two rows of cultivating teeth	1 150 €

Standard equipment:



pierścienie o średnicy 700 mm



łańcuch czyszczący



mechanizm kopiowania terenu

Additional equipment:




lighting



włóka przednia regulowana  
hydrauliczne sprężysta



2 rzędy zębów uprawiających

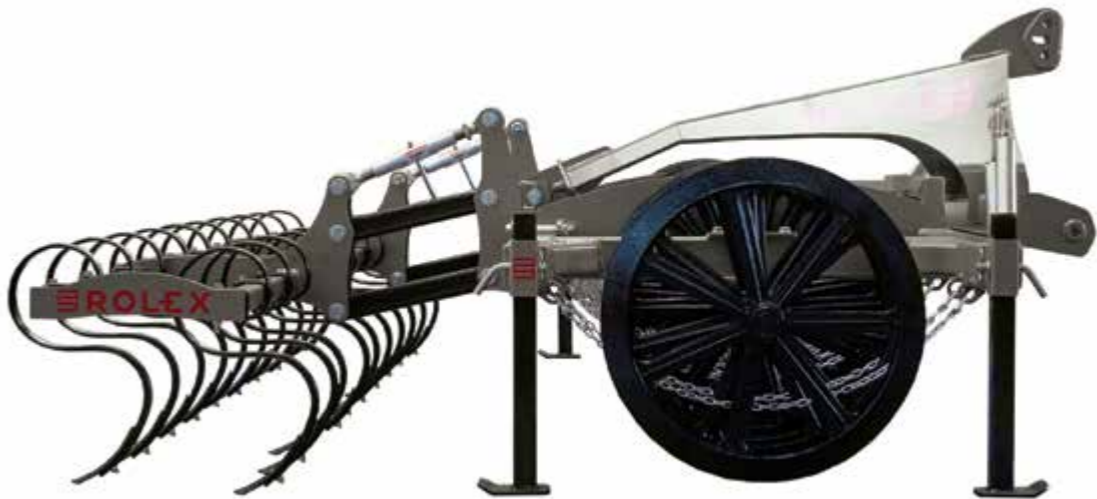



**The knife** roller with a diameter of Ø 380 mm can be mounted directly in front of the disc harrow or on the front three-point linkage. It is made of six segments, on which cutting knives made of 8 mm 30MnB5 steel are mounted. Its main task is to crush catch crops.

**Standard equipment:**

- the knife roller with a diameter of Ø 380 mm
- possibility of cooperation with tillage machines



Width [m]	1.5	2.0	2.5	3.0	3.5	4.0
Weight [kg]	400	520	550	580	610	650
Cutting roller diameter	380					
Knife	80x480					
Power demand [HP]	15	20	25	30	35	40
Net PRICE:	1 700 €	2 250 €	2 850 €	3 300 €	3 950 €	4 500 €
Possibility of cooperation with tillage machines such as harrow, disc aggregates, claws and grubbers.						





Width [m]	1.5	2.0	2.5	3.0	3.5	4.0
Weight [kg]	510	585	720	850	975	1 100
Cutting roller diameter	380					
Knife	80x480					
Power demand [HP]	30	40	50	60	70	80
Net PRICE:	2 550 €	3 350 €	4 200 €	5 000 €	5 800 €	6 700 €
Options:						
Weight pack 500 kg with handles	1 300 €					
Lighting	350 €					

Standard equipment:



ground followings mechanism

Additional equipment:



weight pack 500 kg with handles



lighting



Cutter double tandem with a diameter of Ø 380 mm can be mounted directly on the front three-point linkage.  
It is made of two rows of cutting knives made of 8 mm 30MnB5 steel are mounted.  
Its main task is to crush catch crops.

Standard equipment:

- two rows of cutting knives Ø 380 mm

INDIVIDUAL ROLLER CONFIGURATION AVAILABLE  
WHEN SELECTING ROLLERS ONLY WITHOUT MACHINES.



TUBE ROLLER

The most all- purpose roller of 500mm diameter. It acquits best on light and non-stony soils in dry conditions. It assures a stable operation of the unit on the defined working depth. By leaving the soil slack, there are created good conditions for sowing.

Roller diameter [mm]	Roller weight [kg / linear meter]	Price
Ø 500mm	70 kg / linear meter	price for 210 euro / linear meter
Ø 600mm	90 kg / linear meter	price for 300 euro / linear meter



RING ROLLER

It consists of resilient, made of hardened steel rings. The roller for hard soils cultivation strengthens the soil in strips and by breaking the lumps, it creates better conditions for the soil infiltration. Knife scrapers, which save the roller from blocking or being sealed with wet soil, crumble additionally the lumps of soil which get in spaces between the rings.

Roller diameter [mm]	Roller weight [kg / linear meter]	Price
Ø 500mm	70 kg / linear meter	price for 450 euro / linear meter
Ø 600mm	110 kg / linear meter	price for 470 euro / linear meter



U-BAR ROLLER (with cleaning system)

A roller made of U-shape profiles with a unique feature: during operation, the profiles are filled with soil which protects the rings extending their service life. The rings do not interfere with soil across a wide surface. The main interface with a cultivated strip of land is provided by the soil closing the rings, which protects the field from the formation of a surface compacted layer. Each ring comprising the roller operates independently with respect to the axle. The roller enables optimal preparation of a field for sowing, and is a perfect tool in the mulching technique.

Roller diameter [mm]	Roller weight [kg / linear meter]	Price
Ø 500mm	130 kg / linear meter	price for 610 euro / linear meter
Ø 600mm	170 kg / linear meter	price for 710 euro / linear meter



T-BAR ROLLER (with cleaning system)

A 500 mm diameter roller of properties corresponding to a roof ring roller built of a section of T-bar rings. It consolidates the soil in strips. It is perfect on caked soils due to the aggressive profile of these rings. There is also a section of long scrapers mounted on this roller cleaning inter-ring spaces.

Roller diameter [mm]	Roller weight [kg / linear meter]	Price
Ø 500mm	120 kg / linear meter	price for 610 euro / linear meter
Ø 600mm	160 kg / linear meter	price for 710 euro / linear meter



CRACKER-DISC ROLLER (with cleaning system)

Intended for heavy and arduous soils. Constructed from metal discs and fitted with rigidly fixed knives cutting larger clods of earth to provide an excellent soil crushing effect. No clogging and a very good compacting capacity make the roller highly efficient.

Roller weight [kg / linear meter]	Price
170 kg / linear meter	price for 750 euro / linear meter



TANDEM (DOUBLE ROLLER)

Tandem (double roller) is a proposal for the combination of rollers in several configurations, e.g. tube-tube, tube-string, T-bar-T-bar, T-bar-U-bar, U-bar-U-bar, V-ring-V-ring. The roller allows stable guidance of the aggregate while maintaining the set working depth. It also has a high coefficient of levelling the cultivated strip and secondary soil compaction.

In the case of semi-mounted disc harrows with a tandem roller, the running gear (carriage) must be in the centre of the machine, i.e. between the discs and the rollers.

STRING FLAT ROLLER AND TOOTHED ROLLER

The construction of the roller is similar to the tubular one, it is based on the section of flats set crosswise with a flat or dentate edge. Rollers are relatively light and all-purpose. They are distinguished by good crumbling and smoothing the top soil.

Roller diameter [mm]	Roller weight [kg / linear meter]	Price
Ø 500mm	50 kg / linear meter	price for 210 euro / linear meter
Ø 600mm	70 kg / linear meter	price for 300 euro / linear meter



RUBBER ROLLER (with cleaning system)

This roller is built of rubber rings of 500mm diameter. The roller can work in the conditions of both wet and dry soils. Properties of rubber from which the rings and scrapers are made, allow to eliminate the clogging from the roller and thanks to the optimal diameter and relatively small rolling resistance, there does not occur the effect of “pushing the soil” even at a low operating speed.

Roller weight [kg / linear meter]	Price
170 kg / linear meter	price for 750 euro / linear meter



PACKER ROLLER (with cleaning system)

The full toothed roller of 500mm or 600mm diameter. It is perfect for wet or stony soils or these ones with a large amount of organic remains. The roller’s construction assure the smooth, average compaction of the upper layer of soil on the whole width of the cultivated strip. It is supported by the section of scrapers which clean the roller of the wet soil, it can be successfully used on average and heavy soils. Scrapers are made of quenched steel.

Roller diameter [mm]	Roller weight [kg / linear meter]	Price
Ø 500mm	100 kg / linear meter	price for 340 euro / linear meter
Ø 600mm	125 kg / linear meter	price for 540 euro / linear meter



V-RING ROLLER (with cleaning system)

The use of the roof-shaped roller is particularly recommended for soils with a tendency to lumpishness. The section of knife scrapers support the rings what gives the guaranty of the intensive breaking of soil lumps. The ring roller construction kneads the soil in strips and affects significantly the better soil infiltration.

Roller diameter [mm]	Roller weight [kg / linear meter]	Price
Ø 500mm	115 kg / linear meter	price for 510 euro / linear meter
Ø 600mm	150 kg / linear meter	price for 610 euro / linear meter



CROSSKILL ROLLER

It works best at breaking the lumpish soil. It leaves a strip of soil with a loosen structure, so it also prevents the formation of the crust o its surface. The ring-shaped construction of the roller saves it from blocking itself.

Roller diameter [mm]	Roller weight [kg / linear meter]	Price
Ø 600mm	205 kg / linear meter	price for 750 euro / linear meter



THE ABOVE PRICES ARE A SUPPLEMENT TO A SHAFT OTHER THAN THE STANDARD ONE ON THE MACHINE

ROLLER MODELS:	Width [m]	1.0 m	1.25 m	1.5 m	1.75/1.8 m	2.0/2.2 m
Tube roller / String roller Ø 600		250 €	300 €	350 €	400 €	500 €
Packer roller Ø 500		350 €	400 €	500 €	600 €	700 €
Packer roller Ø 600		450 €	600 €	700 €	850 €	1 000 €
V-ring roller Ø 500		450 €	600 €	700 €	850 €	1 000 €
V-ring roller Ø 600		500 €	650 €	750 €	900 €	1 100 €
U-bar roller / T-bar roller Ø 500		550 €	650 €	800 €	950 €	1 150 €
U-bar roller / T-bar roller Ø 600		600 €	750 €	900 €	1 050 €	1 250 €
Ring roller Ø 500		400 €	500 €	600 €	700 €	850 €
Ring roller Ø 600		450 €	600 €	700 €	800 €	1 000 €
Crosskill roller Ø 500		700 €	850 €	1 050 €	1 250 €	1 500 €
Rubber roller Ø 500		700 €	850 €	1 050 €	1 250 €	1 500 €
Cracker-Disc roller Ø 600		700 €	850 €	1 050 €	1 250 €	1 500 €
Double Tube roller / String roller Ø 600		-	-	-	-	-
Double V-ring roller Ø 500		-	-	-	-	-
Double U-bar roller / T-bar roller Ø 500		-	-	-	-	-



TUBE ROLLER



RING ROLLER



U-BAR ROLLER



T-BAR ROLLER



CRACKER-DISC ROLLER



TANDEM (DOUBLE ROLLER)

WE DO NOT USE DOUBLE ROLLERS FOR CULTIVATOR/SEED DRILL

2.5 m	2.6/2.7m	3.0 m	3.5 m	4.0 m	4.5 m	5.0 m	6.0 m	8.0 m
600 €	650 €	700 €	1 000 €	1 100 €	1 250 €	1 350 €	1 550 €	2 000 €
800 €	900 €	1 000 €	1 350 €	1 500 €	1 650 €	1 850 €	2 150 €	2 800 €
1 150 €	1 250 €	1 350 €	1 800 €	2 000 €	2 250 €	2 450 €	2 900 €	3 800 €
1 150 €	1 250 €	1 350 €	1 800 €	2 000 €	2 250 €	2 450 €	2 900 €	3 800 €
1 250 €	1 350 €	1 500 €	1 950 €	2 200 €	2 450 €	2 700 €	3 200 €	4 200 €
1 350 €	1 450 €	1 600 €	2 050 €	2 300 €	2 600 €	2 850 €	3 350 €	4 400 €
1 450 €	1 550 €	1 750 €	2 250 €	2 500 €	2 800 €	3 100 €	3 650 €	4 800 €
950 €	1 050 €	1 150 €	1 500 €	1 700 €	1 900 €	2 100 €	2 450 €	3 200 €
1 150 €	1 200 €	1 350 €	1 800 €	2 000 €	2 250 €	2 450 €	2 900 €	3 800 €
1 700 €	1 850 €	2 050 €	2 600 €	2 900 €	3 250 €	3 600 €	4 250 €	5 600 €
1 700 €	1 850 €	2 050 €	2 600 €	2 900 €	3 250 €	3 600 €	4 250 €	5 600 €
1 700 €	1 850 €	2 050 €	2 600 €	2 900 €	3 250 €	3 600 €	4 250 €	6 500 €
1 250 €	1 350 €	1 500 €	1 750 €	2 000 €	2 250 €	2 500 €	3 000 €	4 000 €
1 900 €	2 050 €	2 250 €	2 650 €	3 000 €	3 400 €	3 750 €	4 500 €	6 000 €
2 200 €	2 400 €	2 650 €	3 150 €	3 650 €	4 000 €	4 500 €	5 400 €	7 150 €



STRING FLAT – ROLLER  
AND TOOTHED ROLLER



RUBBER ROLLER



PACKER ROLLER



V-RING ROLLER



CROSSKILL ROLLER






## **P.P.H.U. ROL-EX**

Cegielniana Street 9  
97-570 Przedbórz , POLAND

mobile: +48 506 366 964  
e-mail: [tomek@rol-ex.com.pl](mailto:tomek@rol-ex.com.pl)



**[www.rol-ex.com.pl](http://www.rol-ex.com.pl)**