
BALFOR
2026
www.balfor.it

YouTube



A 10 VARIO



A7 VARIO



A12 VARIO

VARIO log splitters are small in size but very effective and powerful. Thanks to the possibility of working in several positions, they guarantee maximum convenience in every situation. The double speed and double pump (the latter for the 12 ton models) guarantee a high hourly output. The new inclined wedge system allows 30% better penetration into the wood, making it possible to work even on particularly hard and knotty logs. The non-slip aluminium inserts fixed to the base of the log splitter allow you to work precisely without having to reposition the log when splitting.

The **VARIO** models are easily movable and, thanks to the possibility of working horizontally as well, allow the operator a comfortable working position at all times.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART			TON	cm	cm	KG	cm	BAR	LITERS	L/MINUTE	SPEED 1 cm/s	SPEED 2 cm/s	RETURN cm/s	HP	Euro
10143	A7 VOR 350 EM 220 Volt		7	42	36	70	110x60x62	245	4,5	5,5	7	/	6,5	2	**1235,52**
10213	A7 VARIO EM 220 Volt		7	56	50	120	144x35x65	245	10	6	4	9,5	6,5	3	**1784,64**
10224	A 7 VARIO ET 380 Volt - 16A		7	56	50	120	144x35x65	245	10	10	5	10	7	3	**1784,64**
10243	A10 VARIO EM 220 Volt		10	56	50	130	144x35x65	245	10	6	2,5	6,5	4,5	3	**1936,89**
10254	A10 VARIO ET 380 Volt - 16A		10	56	50	130	144x35x65	245	10	10	4,5	11	7,5	3	**1936,89**
10231	A10 VARIO C Tractor PTO		10	56	50	140	144x70x90	245	10	14	6	14	10	15	**1936,89**
10265	A10 VARIO SB Fuel Engine / Benz.		10	56	50	100	144x35x65	245	10	7,5	3,2	7,7	5,4	6	**2549,66**
10283	A12 VARIO EM 220 Volt	✓	12	70	65	190	185x60x95	245	17	16	7,5	20	12	3	**2728,12**
10294	A12 VARIO ET 380 Volt - 16A	✓	12	70	65	190	185x60x95	245	17	16	7,5	18	12	3	**2728,12**
10271	A12 VARIO C Tractor PTO		12	70	65	190	185x75x115	245	17	27	9	23	15	20	**2789,28**
10305	A12 VARIO SB Fuel Engine / Benz.	✓	12	70	65	170	185x60x95	245	17	13	6	15	10	6	**3441,98**

PARTNERS











OPTIONALS

A7 - A10

		Euro
OPA91	Double pump (only for A10 VARIO EM-ET)	380,64



		Euro
OPH1	Option Honda engine (only for "Vario SB")	317,00



YouTube

BALFOR®

WARRANTY 5 YEARS ON ALL FRAME FROM RECHARGES

C 90



SBF 801



C90 log splitters are the result of the evolution of the classic log splitter. Thanks to their 8.5 tons of splitting force and their thin, sharpened and angled blade, they can work effectively on hard and knotty logs. The widened work table allows for easy and practical operation; the aluminum insert at the base of the table makes it possible to work precisely without repositioning the log during the splitting phase. The return stroke of the wedge is adjustable in order to avoid downtime. The PLUS model, equipped with a double pump, guarantees extremely high efficiency thanks to the automatic dual speed. Next to the control levers, supports have been provided to rest split or unsplit logs, avoiding the need to pick them up from the ground each time.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART			TON	cm	cm	KG	cm	BAR	LITERS	L/MINUTE	SPEED 1 cm/s	SPEED 2 cm/s	RETURN cm/s	HP	Euro
10023	SBF 801 EM 220 V		8	55	50	120	110x60x40	245	8	4,5	3	/	5	3	**696,00**
10040	C90 EM 220 V		8,5	55	50	156	160x70x90	245	10	4,5	6	/	10	3	**1642,36**
10041	C90 ET 380 V		8,5	55	50	154	160x70x90	245	10	4,5	3	/	6	3	**1642,36**
10044	C90 EM PLUS 220 V	✓	8,5	55	50	156	160x70x90	245	10	24	19	/	14	3	**1817,08**
10055	C90 ET PLUS 380 V	✓	8,5	55	50	154	160x70x90	245	10	24	19	/	14	3	**1817,08**
10032	C90 C TRACTOR PTO		8,5	55	50	149	160x70x90	245	10	19	15	/	11	20	**1817,08**
10066	C90 SB PLUS FUEL ENGINE / BENZ.	✓	8,5	55	50	120	160x70x90	245	10	13	11	/	8	6	**2403,64**

PARTNERS

OPTIONALS

C90

		Euro
OPA113	Cross wedge	**224,64**



		Euro
OPA112	Mobile pump for C model (instead of fixed pump)	**157,24**



		Euro
OPH1	Option Honda engine (only for "C90 SB PLUS")	**317,00**



YouTube

BALFOR®

WARRANTY 5 YEARS ON ONLY FRAME FROM RECOVERIES

BR 13 500



PRO 16 K





PRO 16 K ROAD

The **BR13** is a log splitter with 55 cm stroke and adjustable table, ideal for those preparing wood for stoves, fireplaces or boilers. Thanks to its dual speed and 13 ton splitting power it proves to be a productive and very robust tool. The **Pro 16K** is a very robust and well-designed log splitter, built on a non-deformable beam and with a tank separated from the structure. Fast and powerful, it is ideal for those working on large and heavy logs. Double speed and 16 tons of power allow effectiveness at the highest level.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART			TON	cm	cm	KG	cm	BAR	LITERS OIL	L./MINUTE	SPEED 1 cm/s	SPEED 2 cm/s	RETURN cm/s	RPM	HP	Euro
10373	**PRO 16 K EM** 220 Volt	✓	16	70	65	250	170x70x95	240	28	16	6,5	20	10	350	3	**3040,12**
10384	**PRO 16 K ET** 380 Volt	✓	16	70	65	250	170x70x95	240	28	16	6,5	20	10	350	3	**3021,40**
10392	**PRO 16 K PI** Tractor hydraulics		16	70	65	195	170x70x95	240	-	/	/	/	/	350	/	**2256,38**
10361	**PRO 16 K C** Tractor PTO		16	70	65	270	170x70x95	240	28	27	10	24	16	350	30	**2875,39**
10405	**PRO 16 K SB** Fuel Engine / Benz.	✓	16	70	65	265	170x70x95	240	28	13	3,7	7,4	7,4	350	6	**3747,74**
10425	**PRO 16 K ROAD** Fuel Engine / Benz.	✓	16	70	65	355	166x70x95	240	22	13	3,7	7,4	7,4	350	6	**4908,38**
10451	**BR 13 500 C** Tractor PTO		13	55	50	235	210x70x95	230	20	27	9	23	15	350	30	**2613,31**
10433	**BR 13 500 EM** 220 Volt	✓	13	55	50	235	210x70x80	230	20	16	7,5	20	12	350	3	**2944,03**
10444	**BR 13 500 ET** 380 Volt		13	55	50	235	210x70x80	230	20	16	7,5	18	12	350	5,5	**2957,76**
10462	**BR 13 500 PI** Tractor hydraulics		13	55	50	215	210x70x95	230	-	/	/	/	/	350	/	**2039,23**
10475	**BR 13 500 SB** Fuel Engine / Benz.	✓	13	55	50	255	210x70x80	230	20	13	4,2	10,7	6,9	350	6	**3696,57**

PARTNERS

OPTIONALS

PRO16K - PRO16 K ROAD

ART		Euro
OPA1	4-way wedge	210,91



ART			Euro
OPA2	Detatched pump for C model	(instead of fixed pump)	156,00
	Pallet packaging	(80x120)	



ART			Euro
OPH1	Honda Engine option	only for "BR 13 500 SB"	317,00



YouTube



CA*
VERSION WITH WINCH



CA RADIO**
VERSION WITH REMOTE CONTROLLED WINCH



PRO 13



PRO 22 BIG



PRO 19 BIG SB ROAD

PRO 22 BIG

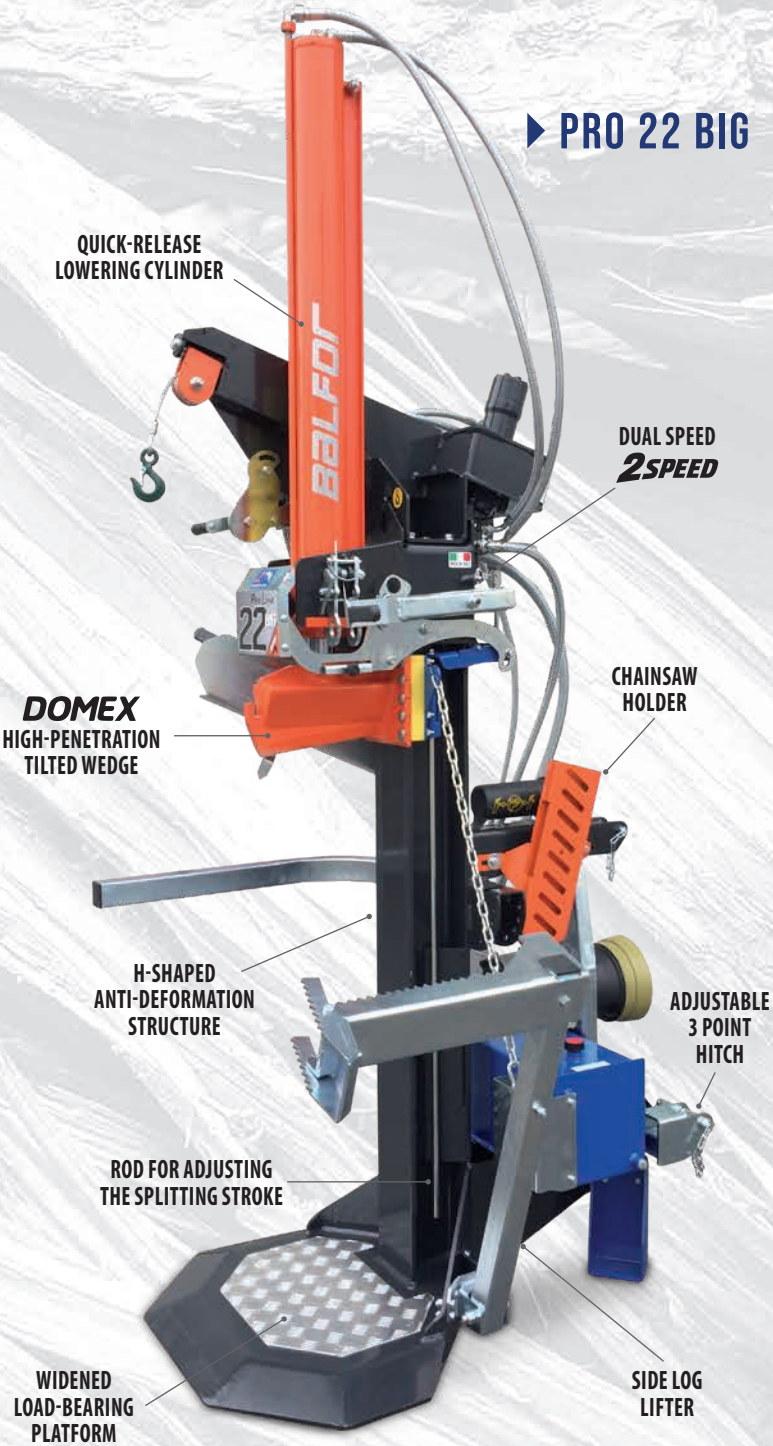

Pro line is Balfor's range of high-performance log splitters. Thanks to first-class components and high power and speed, the log splitters in this series offer unbeatable value for money. The structure on a non-deformable beam, separate tank, side log loader (only for tractor versions) Domex steel inclined wedge, make it an ideal tool for professionals.

The CA versions have a log puller winch as standard, which has a towing capacity of 1 tonne. The winch, which has a 13-metre cable, has an automatic unwinding device that allows it to be used quickly and conveniently by a single operator. Enriching the machine's equipment are the axe holder, chainsaw holder, adjustable linkages for tractor, large base frame with sloping edges, high right handle and movable left handle mounted on bearings, and steel-mesh coated.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART			TON	cm	cm	KG	cm	BAR	LITERS	L/MINUTE	SPEED cm/s	SPEED cm/s	RETURN cm/s	RPM	HP	Euro
10731	PRO13 C Tractor PTO		13	113	100	320	180/272x120x80	250	28	30	9	23	15	350	30	3097,53
10711	PRO13 CA* Tractor PTO		13	113	100	420	210/272x120x80	250	28	30	9	23	15	350	30	4557,69
10718	PRO13 CA radio** Tractor PTO		13	113	100	420	210/272x120x80	250	28	30	9	23	15	350	30	5368,89
10713	PRO13 EM 220 Volt	✓	13	113	100	335	180/272x120x80	250	28	16	7,5	20	12	1450	3	3475,68
10724	PRO13 ET 380 Volt - 16A		13	113	100	335	180/272x120x80	250	28	16	7,5	18	12	1450	5,5	3475,68
10747	PRO13 C+EM Tractor PTO+ 220 Volt	✓	13	113	100	350	180/272x120x80	250	28	30/16	3/7,5	23/20	15/12	350/1450	30/3	3866,30
10758	PRO13 C+ET Tractor PTO+ 380 Volt - 16A		13	113	100	370	180/272x120x80	250	28	30/16	9/7,5	23/18	15/12	350/1450	30/5,5	3866,30
10762	PRO13 PI Tractor Hydraulics		13	113	100	290	180/272x120x80	250	/	/	/	/	/	/	/	2706,91
10775	PRO13 SB Fuel Engine/Benz.	✓	13	113	100	370	180/272x120x80	250	28	13	4,2	10,7	6,9	3600	6	4118,40
19775	PRO13 SB ROAD (OMOLOGATA) Fuel Engine/Benz. Honda	✓	13	113	100	430	-	250	28	13	4,2	10,7	6,9	3600	6	5966,68
10801	PRO16 C Tractor PTO		16	113	100	335	180/272x120x80	250	28	30	6	16	16	350	30	3533,08
10712	PRO16 CA* Tractor PTO		16	113	100	435	210/272x120x80	250	28	30	6	16	16	350	30	4993,24
10719	PRO16 CA radio** Tractor PTO		16	113	100	435	210/272x120x80	250	28	30	6	16	16	350	30	5804,44
10783	PRO16 EM 220 Volt	✓	16	113	100	350	180/272x120x80	250	28	20	6,5	20	10	1450	5,5	3912,48
10794	PRO16 ET 380 Volt - 16A		16	113	100	350	180/272x120x80	250	28	20	6	18	10	1450	5,5	3912,48
10817	PRO16 C+EM Tractor PTO+ 220 Volt	✓	16	113	100	360	180/272x120x80	250	28	30/16	3/6,5	16/20	16/10	350/1450	30/5,5	4301,85
10828	PRO16 C+ET Tractor PTO+380 Volt - 16A		16	113	100	375	180/272x120x80	250	28	30/20	6/6	16/18	16/10	350/1450	30/5,5	4301,85
10832	PRO16 PI Tractor Hydraulics		16	113	100	290	180/272x120x80	250	/	/	/	/	/	/	/	3143,71
10845	PRO16 SB Fuel Engine/Benz.	✓	16	113	100	350	180/272x120x80	250	28	32	9	18	18	3600	6	4566,43
19845	PRO16 SB ROAD (OMOLOGATA) Fuel Engine/Benz. Honda	✓	16	113	100	450	-	250	28	32	9	18	18	3600	6	6878,97
10851	PRO19BIG C Tractor PTO		19	123	110	390	190/290x125x90	250	45	45	11	25	19	350	40	4095,93
10714	PRO19BIG CA* Tractor PTO		19	123	110	490	220/290x125x90	250	45	45	11	25	19	350	40	5554,84
10720	PRO19BIG CA radio** Tractor PTO		19	123	110	490	220/290x125x90	250	45	45	11	25	19	350	40	6366,04
10874	PRO19BIG ET 380 Volt - 16A	✓	19	123	110	410	190/290x125x90	250	45	20	5,5	12	10	1450	5,5	4612,60
10868	PRO19BIG C+ET Tractor PTO+380 Volt - 16A	✓	19	123	110	420	190/290x125x90	250	45	45/20	11/5,5	25/12	19/10	350/1450	40/5,5	5255,32
10882	PRO19BIG PI Tractor Hydraulics		19	123	110	300	190/290x125x90	250	/	/	/	/	/	/	/	3711,55
10895	PRO19BIG SB Fuel Engine/Benz.	✓	19	123	110	390	190/290x125x90	250	45	32	8,5	18,5	15	3600	9	5770,75
19895	PRO19BIG SB ROAD (OMOLOGATA) Fuel Engine/Benz. Honda	✓	19	123	110	480	-	250	45	32	8,5	18,5	15	3600	9	7619,04
10901	PRO22BIG C Tractor PTO		22	123	110	420	190/290x125x90	250	45	45	9	25	15	350	40	4416,67
10715	PRO22BIG CA* Tractor PTO		22	123	110	520	220/290x125x90	250	45	45	9	25	15	350	40	5876,83
10721	PRO22BIG CA radio** Tractor PTO		22	123	110	520	220/290x125x90	250	45	45	9	25	15	350	40	6688,03
10924	PRO22BIG ET 380 Volt - 16A	✓	22	123	110	440	190/290x125x90	250	45	20	4,5	12	7	1450	5,5	4910,88
10918	PRO22BIG C+ET Tractor PTO+380 Volt - 16A	✓	22	123	110	460	190/290x125x90	250	45	45/20	9/4,5	25/12	15/7	350/1450	40/5,5	5576,06
10932	PRO22BIG PI Tractor Hydraulics		22	123	110	350	190/290x125x90	250	/	/	/	/	/	/	/	4016,06
10945	PRO22BIG SB Fuel Engine/Benz.	✓	22	123	110	410	190/290x125x90	250	45	32	7	16	13	3600	9	6081,50
19945	PRO22BIG SB ROAD (OMOLOGATA) Fuel Engine/Benz. Honda	✓	22	123	110	490	-	250	45	32	7	16	13	3600	9	7917,31

PARTNERS

OPTIONALS

PRO

		Euro
OPA1	Cross wedge (PRO 13 - 16)	210,91
OPS1922V1	Cross wedge (PRO 19 - 22)	259,58



		Euro
OPPRO1316V3	Adjustable table (PRO 13 - 16)	210,91
OPPRO1922V3	Adjustable table (PRO 19 - 22)	259,58



		Euro
OPH1	Option Honda engine (solo per "PRO 13 SB" - "PRO 16 SB")	317,00
OPH2	Option Honda engine (solo per "PRO 19 SB" - "PRO 22 SB")	439,29



		Euro
OPS2	Mobile pump only C models (instead of the fixed one)	156,00





A 16 OR



A 16 OR



A 22 OR

A16-A22 are the traditional horizontal log splitters, robust and practical thanks to their construction on a non-deformable beam, available in many versions and always with double speed and 4-split wedge.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART			TON	cm	KG	cm	BAR	LITERS OIL	L./MINUTE	SPEED cm/s	SPEED cm/s	RETURN cm/s	RPM	HP	Euro
11231	**A16 OR 650 C** Tractor PTO		16	70	280	190x80x85	220	35	40	9	24	14	350	40	**3358,36**
11224	**A16 OR 650 ET ROAD** 380 Volt		16	70	330	210x120x115	220	35	20	4,5	12	7	1450	5,5	**4939,58**
11242	**A16 OR 650 PI** Tractor hydraulics		16	70	200	190x80x85	220	35	/	/	/	/	/	/	**2728,12**
11255	**A16 OR 650 SB ROAD** Fuel Engine / Benz.	✓	16	70	330	210x120x115	220	35	13	2,7	7,5	4,2	3600	6	**5150,49**
11281	**A16 OR 1060 C** Tractor PTO		16	110	340	275x80x85	220	35	40	9	24	14	350	40	**3760,22**
11274	**A16 OR 1060 ET ROAD** 380 Volt		16	110	390	295x120x115	220	35	20	4,5	12	7	1450	5,5	**5322,72**
11292	**A16 OR 1060 PI** Tractor hydraulics		16	110	265	275x80x85	220	35	/	/	/	/	/	/	**3136,22**
11305	**A16 OR 1060 SB ROAD** Fuel Engine / Benz.	✓	16	110	390	295x120x115	220	35	32	6,5	19	11	3600	6	**6049,05**
11331	**A22 OR 1060 C** Tractor PTO		22	110	460	290x90x95	230	45	70	15	36	24	350	85	**5629,72**

PARTNERS

MARZOCCHI · ATPE · Q8 Oils · HGB HYDRAULICS · HONDA · DOMEX

OPTIONALS

ART			Euro
OPA220R5	Lateral hydraulic loading	(only 1050)	**2039,23**
OPA160R4	Sprung axle	(road version only)	**445,53**

ART			Euro
OPA160R3	Wheels and drawbar for road use	(rigid axle, only for private road)	**763,77**

Included "ROAD" models

ART			Euro
OPH1	Honda Engine option	only for "SB"	**316,99**

FOR SPECIAL SIZES CONTACT THE FACTORY

YouTube

BALFOR®

WARRANTY 5 YEARS ON THE FRAME FROM DEFORMITIES

▸ PRO 50 OR 2100



▸ PRO 50 OR 1280 ROAD



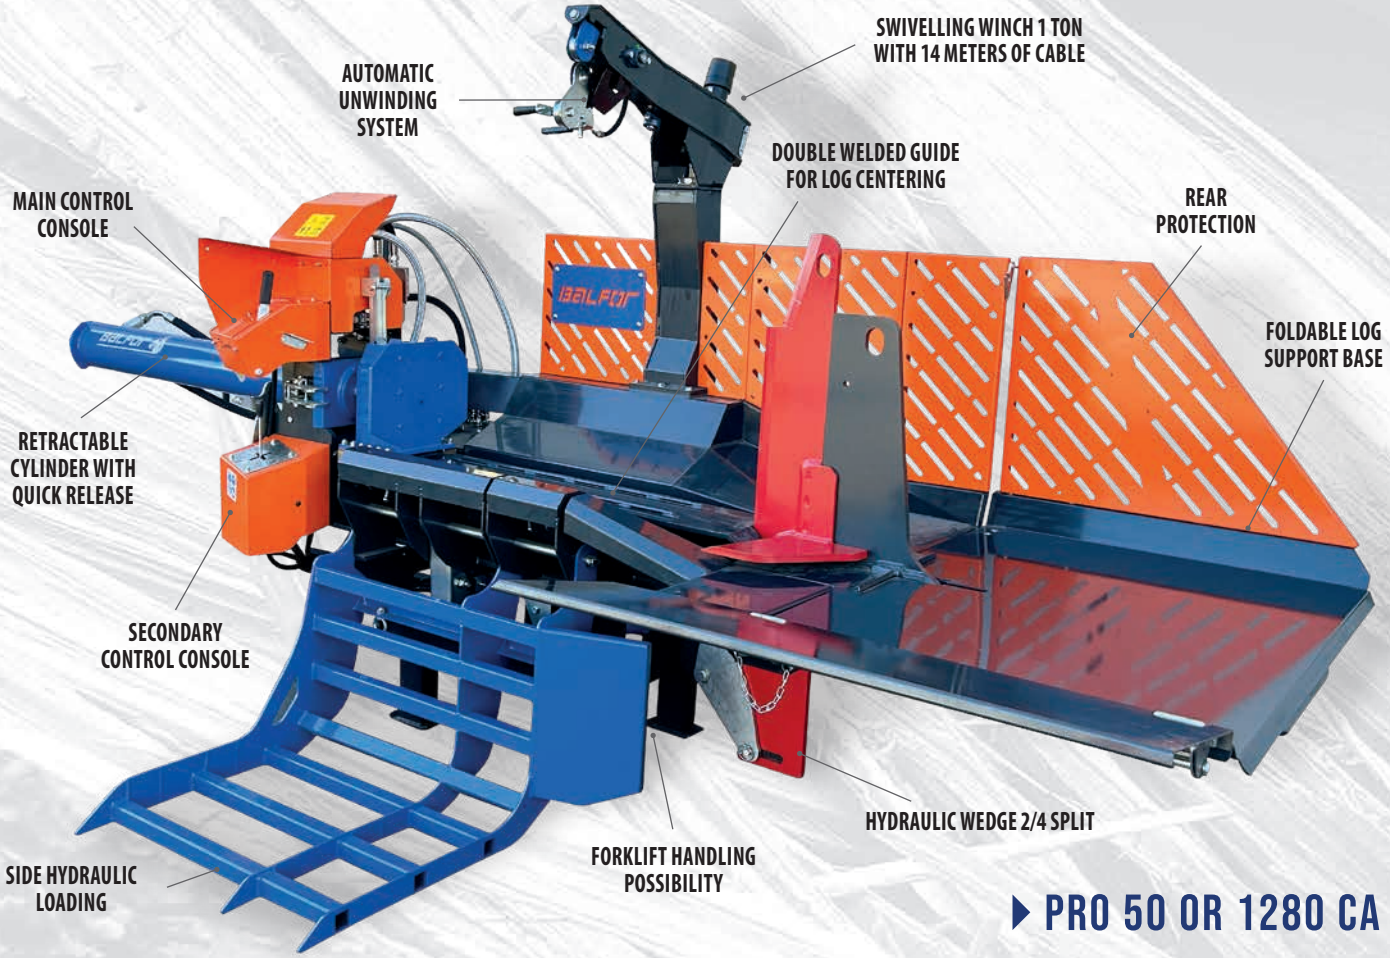

▸ PRO 50 OR 1280 CA

PARTNERS

MARZOCCHI · TPE · Q8 Oils · IRONCUT · HGB HYDRAULICS · DOMEX · ELCA RADIOCONTROLS

The **horizontal log splitters of the PRO series** are extremely robust, built with the best equipment and highly effective. Thanks to hydraulic loading, the AUTOLOAD versions are able to position the logs during the splitting phase and, thanks to the hydraulic wedge, the operator can split the log with extreme precision. The table behind the wedge allows the operator to take the split log and split it again; this operation is made easy by the sinuous design of the supporting frame. The entire frame, as well as the hydraulic wedge, are made of non-deformable DOMEX steel, guaranteeing quality and maximum durability over time. The ROAD versions are equipped with rear lights, large trailer wheels and a removable drawbar.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it



ART		TON	cm	KG	cm	BAR	LITERS OIL	L./MINUTE	SPEED 1 cm/s	SPEED 2 cm/s	RETURN cm/s	RPM	HP	Euro
11441	PRO22 OR 1250 C AUTOLOAD Tractor PTO	22	125	600	400x136x132/84	230	50	40	9	24	14	430	45	8512,60
11454	PRO22 OR 1250 ET AUTOLOAD 380 Volt - 16A	22	125	700	400x136x132/84	230	50	20	7,7	22	12	430	5,5	9730,65
11466	PRO36 OR 1250 C AUTOLOAD Tractor PTO	36	125	980	420x176x142/94	230	85	90	10	19	20	430	85	12489,98
11467	PRO36 OR 1250 ET AUTOLOAD 380 Volt - 32A	36	125	1080	420x176x142/94	230	85	67	7,2	15	15	430	15	14210,97
11468	PRO50 OR 1280 C AUTOLOAD Tractor PTO	50	128	1650	420x176x142/94	230	115	100	8,2	21	13,5	480	95	15350,40
11469	PRO50 OR 1280ET AUTOLOAD 380 Volt - 63A	50	128	1750	420x176x142/94	230	115	90	7,4	19	12	480	20	17198,68



CA*
VERSIONS WITH WINCH



CA RADIO**
REMOTE-CONTROLLED WINCH VERSIONS

OPTIONALS

PRO 22 OR 1250

		Euro
OPPRO120R1	6 way wedge	675,16
OPPRO220R2	8 way wedge	861,12
OPTERU	Wheels and lights	1497,60
OPAB3459	CA Winch Version	1800,00
OPAB3462	CA Radio - Remote-Controlled Winch Version	2520,00

PRO 50 OR 1280

		Euro
CLT 0051	6 way wedge	1284,68
CLT 0052	8 way wedge	1622,40
OPCAR 50	Wheels and lights	2371,20
KITCOOLER	Oil Cooler	748,80
OPAB3461	CA Winch Version	2280,00
OPAB3464	CA Radio - Remote-Controlled Winch Version	3000,00

PRO 36 OR 1250

		Euro
OPA3457	Provision for low-power tractor (50 HP)	867,36
OPA3456	6 way wedge	1039,58
OPB3456	8 way wedge	1108,22
OPA3450	Wheels and lights	1872,00
KITCOOLER	Oil Cooler	748,80
OPAB3460	CA Winch Version	2040,00
OPAB3463	CA Radio - Remote-Controlled Winch Version	2760,00



INCLUDED



OPTIONALS



ART		TON	cm	KG	cm	BAR	LITERS OIL	L./MINUTE	SPEED 1 cm/s	SPEED 2 cm/s	RETURN cm/s	RPM	HP	Euro
11475	PRO36 OR 2100 C ROAD Tractor PTO	36	210	1610	720x176x142/94	230	85	90	10	19	20	430	85	16139,13
11476	PRO50 OR 2100 C ROAD Tractor PTO	50	210	2250	720x176x142/94	230	115	120	10	25	16	480	95	18969,60
11477	PRO36 OR 2600 C ROAD Tractor PTO	36	260	1990	720x176x142/94	230	85	90	10	19	20	430	85	17963,71
11478	PRO50 OR 2600 C ROAD Tractor PTO	50	260	2800	720x176x142/94	230	115	120	10	25	16	480	95	20716,80



VERSION AUTOLOAD



EVO OPV1
REMOTE CONTROL

OPTIONALS

PRO 50 OR 2100/2600

		Euro
CLT 0051	6 way wedge	1284,68
CLT 0052	8 way wedge	1622,40
AUTOLOAD	Hydraulic Side Loader	1920,00
KITCOOLER	Oil Cooler	748,80
OPV1	EVO Remote Control (Splitting Cylinder and Hydraulic Wedge)	1800,00

PRO 36 OR 2100/2600

		Euro
OPA3457	Provision for low-power tractor (50 HP)	867,36
OPA3456	6 way wedge	1039,58
OPB3456	8 way wedge	1108,22
AUTOLOAD	Hydraulic Side Loader	1920,00
KITCOOLER	Oil Cooler	748,80
OPV1	EVO Remote Control (Splitting Cylinder and Hydraulic Wedge)	1800,00

YouTube



SHARK 700 C



DI 600 EM



SHARK 700 EM

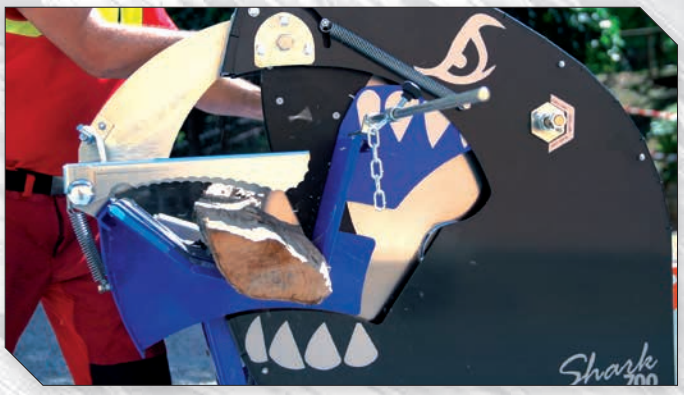

SHARK saws are the result of careful study and decades of experience in the manufacture of professional saws. SHARK is in fact the only saw that allows cutting logs over 30 cm in diameter and the only one capable of guaranteeing good visibility during operation. Shark allows safe work without obstructing the view of the cutting operations.

All other circular saws have a metal plate that covers the log and the blade, preventing visibility for the operator. Chainsaw holder, adjustable rear blade guides, WIDIA blade, 3-belt transmission (not available in 220V), dust extractor preparation, emergency brake, double log-locking handle mounted on bearings are just some of the features that make SHARK a superior-level product. **SHARK**, like all Balfor products, complies with the most recent safety regulations in force.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART				Ø cm	KG	cm	RPM	HP	Euro
41783	**DI 600 EM** 220 Volt		600-4-Z48 WIDIA	20	108	80x85x115	1450	3	**1406,49**
41831	**SHARK 700 C** Tractor PTO		700-4.2-Z60 WIDIA	30	175	125x78x125	350	25	**2023,00**
41813	**SHARK 700 EM** 220 Volt		700-4.2-Z60 WIDIA	30	210	125x76x110	1450	3	**2148,00**
41824	**SHARK 700 ET** 380 Volt - 16A		700-4.2-Z60 WIDIA	30	210	125x76x110	1450	5.5	**2417,37**
41861	**SHARK 750 C** Tractor PTO		750-4.3-Z60 WIDIA	32.5	175	125x78x125	280	25	**2266,36**
41874	**SHARK 750 ET** 380 Volt - 16A		750-4.3-Z60 WIDIA	32.5	210	125x76x110	1450	5.5	**2566,80**
41845	**SHARK 700 SB** Fuel Engine / Benz.		700-4.2-Z60 WIDIA	30	200	125x78x145	3600	6	**2479,77**
41885	**SHARK 750 SB** Fuel Engine / Benz.		750-4.3-Z60 WIDIA	32.5	200	125x78x145	3600	6	**2722,80**
41855	**SHARK 700 SB ROAD** (versione trainata - towable version - version routière) Fuel Engine / Benz.		700-4.2-Z60 WIDIA	30	240	125x78x145	3600	6	**3079,20**
41895	**SHARK 750 SB ROAD** (versione trainata - towable version - version routière) Fuel Engine / Benz.		750-4.3-Z60 WIDIA	32.5	240	125x78x145	3600	6	**3322,80**
		✓ TON							
41903	**SHARK 708 EM** 220 Volt	✓	8.5 700-4.2-Z60 WIDIA	30 - 8,5 Ton.	360	/	1450	3	**3751,48**
41914	**SHARK 708 ET** 380 Volt - 16A	✓	8.5 700-4.2-Z60 WIDIA	30 - 8,5 Ton.	360	/	1450	5.5	**4042,27**
13959	**SHARK 708 SB** Fuel Engine / Benz.		8.5 700-4.2-Z60 WIDIA	30 - 8,5 Ton.	360	/	3600	6.5	**4105,92**

PARTNERS





YouTube

SHARK 700 EXPERT

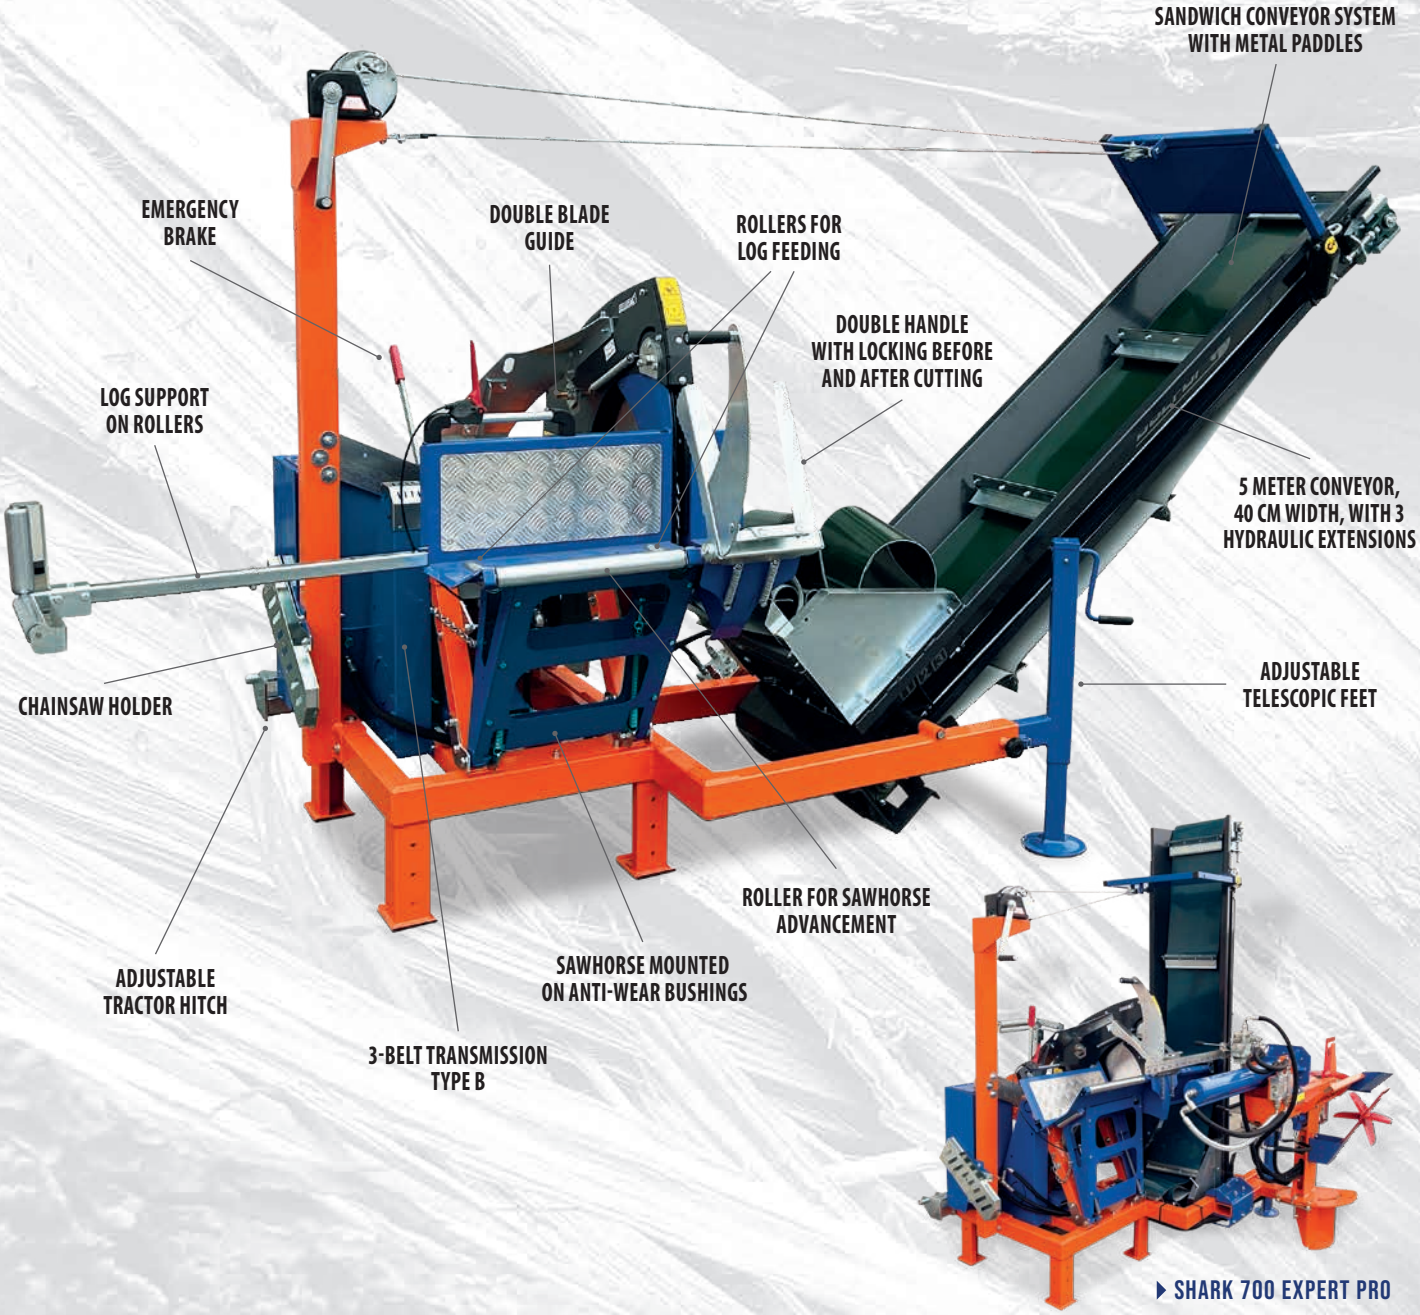

SHARK 700 EXPERT PRO

SHARK EXPERT is the combination of the SHARK saw with a 40 cm wide conveyor belt with three hydraulic extensions. Thanks to the three extensions, SHARK EXPERT can benefit from a 5-meter conveyor that, once closed, is truly compact. Thanks to the 40 cm width between the sides, it offers very high evacuation capacity. The belt extension is hydraulic, all paddles are made of metal and the reinforced PVC sections are interchangeable.

SHARK 700 Expert Pro completes the Shark 700 Expert by adding a side log splitter with hydraulic wedge. The log splitter supplied with the Pro version is 16 tons and the hydraulic wedges included are 2/4-way and 6-way. In both cases, the splitting length is 55 cm. During transport, the log splitter can be folded to remain within the machine's overall dimensions.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		TON	Ø cm		KG	cm	LITERS OIL	RPM	HP	Euro
41900	**SHARK 700 C EXPERT** Tractor PTO + Tractor Hydraulics		700-4.2-Z60 WIDIA	30	5m/40cm	440	235x120x120		350	25	**5798,20**
41908	**SHARK 700 C EXPERT direct drive** Tractor PTO		700-4.2-Z60 WIDIA	30	5m/40cm	440	235x120x120	10,5	350	25	**6404,73**
41901	**SHARK 750 C EXPERT** Tractor PTO + Tractor Hydraulics		750-4.3-Z60 WIDIA	32.5	5m/40cm	440	235x120x120		280	25	**5921,76**
41909	**SHARK 750 C EXPERT direct drive** Tractor PTO		750-4.3-Z60 WIDIA	32.5	5m/40cm	440	235x120x120	10,5	280	25	**6528,28**
41904	**SHARK 700 ET EXPERT** 380 Volt - 16A		700-4.2-Z60 WIDIA	30	5m/40cm	460	235x120x120		1450	5,5	**7320,76**
41906	**SHARK 750 ET EXPERT** 380 Volt - 16A		750-4.3-Z60 WIDIA	32.5	5m/40cm	470	235x120x120		1450	5,5	**7576,60**
41915	**SHARK 700 SB EXPERT ROAD** Fuel Engine / Benz.		750-4.3-Z60 WIDIA	30	5m/40cm	500	235x120x140		3600	6	**7924,80**
41910	**SHARK 700 C EXPERT PRO** Tractor PTO 16 ton logsplitter with hydraulic knife 2/4/6	16	700-4.2-Z60 WIDIA	30	5m/40cm	700	235x120x120	28	350	35	**9447,36**

PARTNERS

OPTIONALS

SHARK		Euro
OPSH1	Logsplitter for Shark Expert 16 ton with hydraulic knife (tractor's hydraulics)	3518,11

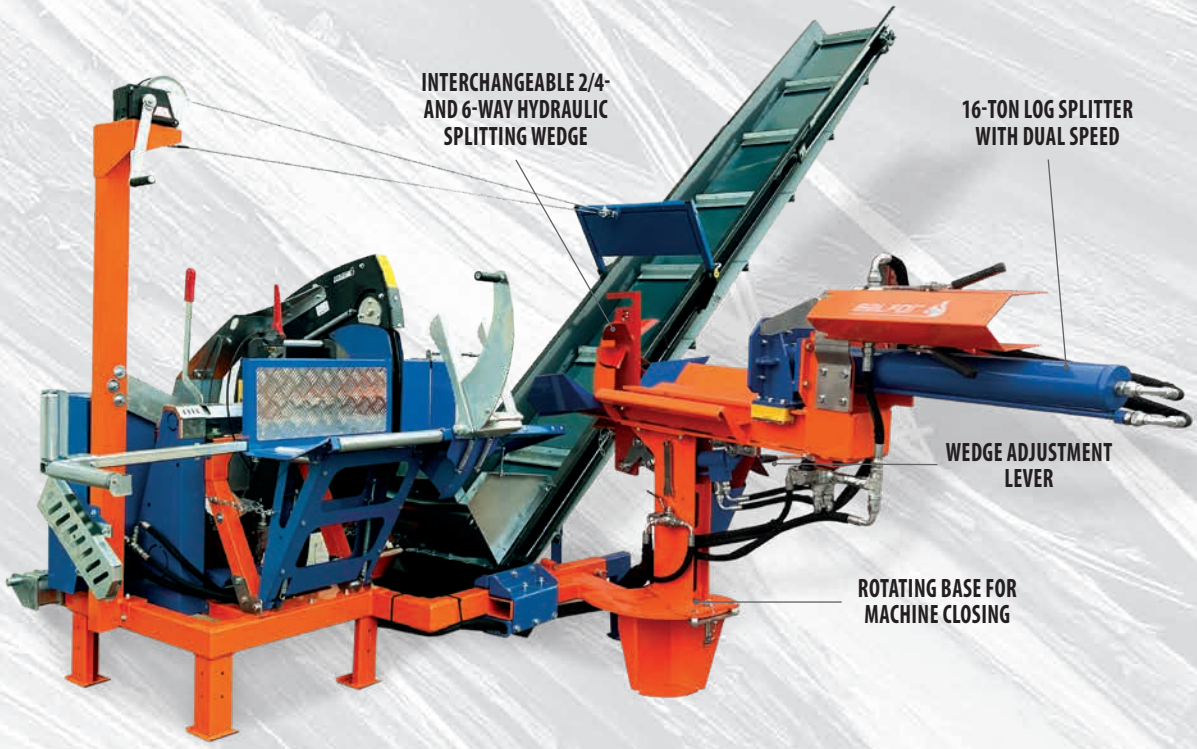

YouTube

SAMURAI EXPERT AUTOMAT

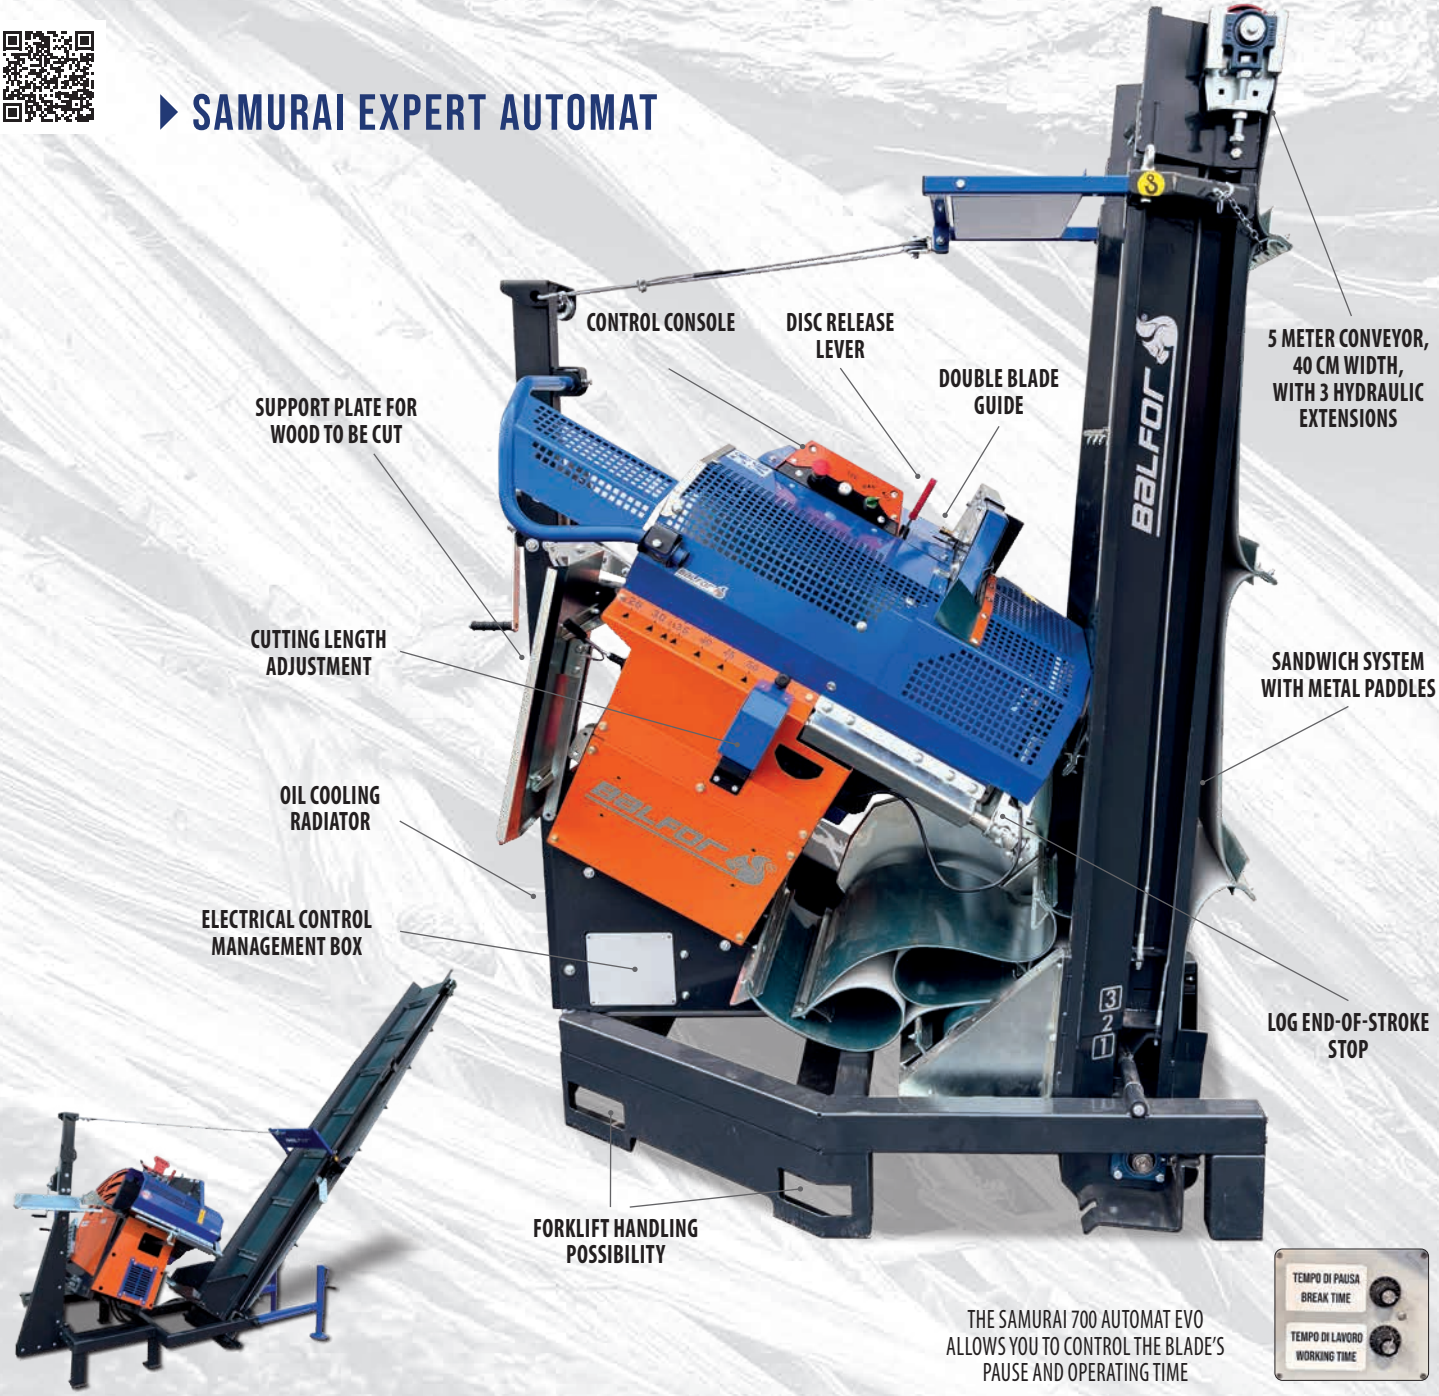

THE SAMURAI 700 AUTOMAT EVO ALLOWS YOU TO CONTROL THE BLADE'S PAUSE AND OPERATING TIME

SAMURAI 700 is the mobile circular saw capable of cutting with great ease all types of wood, logs or bundles of branches. Thanks to its innovative system, **SAMURAI 700** allows you to work without pushing the full weight of the sawhorse and the log. It is a very practical, fast and above all safe saw. Thanks to top-level components such as the Widia blade, the rollers on the table for advancing the log and the fully hydraulic transmission in the PTO version, **SAMURAI 700** is a saw of a higher level than any other.

SAMURAI 700 AUTOMAT EVO and **SUPERAUTOMAT** are Balfor's automatic saws, simple, fast and highly productive, boasting a maximum output of 7 cubic meters per hour. These automatic saws make it possible to operate on round wood or already split wood. The operator only needs to take care of loading the wood to be cut and the machine continues operating on its own. The cutting length is adjustable from 25 to 50 cm in 5 cm increments and the 700 mm blade is capable of cutting up to 25 cm in diameter. Thanks to the fully hydraulic transmission, maintenance is reduced to a minimum.
The Superautomat version also includes a sensor that detects the presence of the wood during the cutting phase and regulates its movements accordingly.

SAMURAI 700 AUTOMAT EVO operates with a continuous automatic cycle and gravity-fed log advancement.

SAMURAI 700 SUPERAUTOMAT operates with an end-of-stroke sensor; the blade advances when the log reaches the end. In addition, a roller is present that advances the wood before cutting.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART			Ø cm		KG	cm	LITERS OIL	RPM	HP	Euro
41791	**SAMURAI 700 C** Tractor PTO	700-4.2-Z60 WIDIA	25		295	125x78x125	32	350	25	**3709,05**
41923	**SAMURAI 700 EM** 220 Volt	700-4.2-Z60 WIDIA	25		235	125x76x110		1450	3	**2912,83**
41943	**SAMURAI 700 ET** 380 Volt - 16A	700-4.2-Z60 WIDIA	25		230	125x76x110		1450	3	**2912,83**

ART			Ø cm		KG	cm	LITERS OIL	RPM	HP	Euro
41983	**SAMURAI 700 AUTOMAT EVO** Tractor PTO	700-5.5-Z60 WIDIA	22	5m/40cm	640	230x120x120	32	350	25	**10727,80**
41803	**SAMURAI 700 SUPERAUTOMAT** Electric sensor - Tractor PTO	700-5.5-Z60 WIDIA	22	5m/40cm	660	230x120x120	32	350	25	**11558,97**

PARTNERS

OPTIONALS

		Euro
OPNINJ1	Power PTO 11 KW 36A	**4992,00**





SAMURAI 700

YouTube

NINJA 800 EXPERT

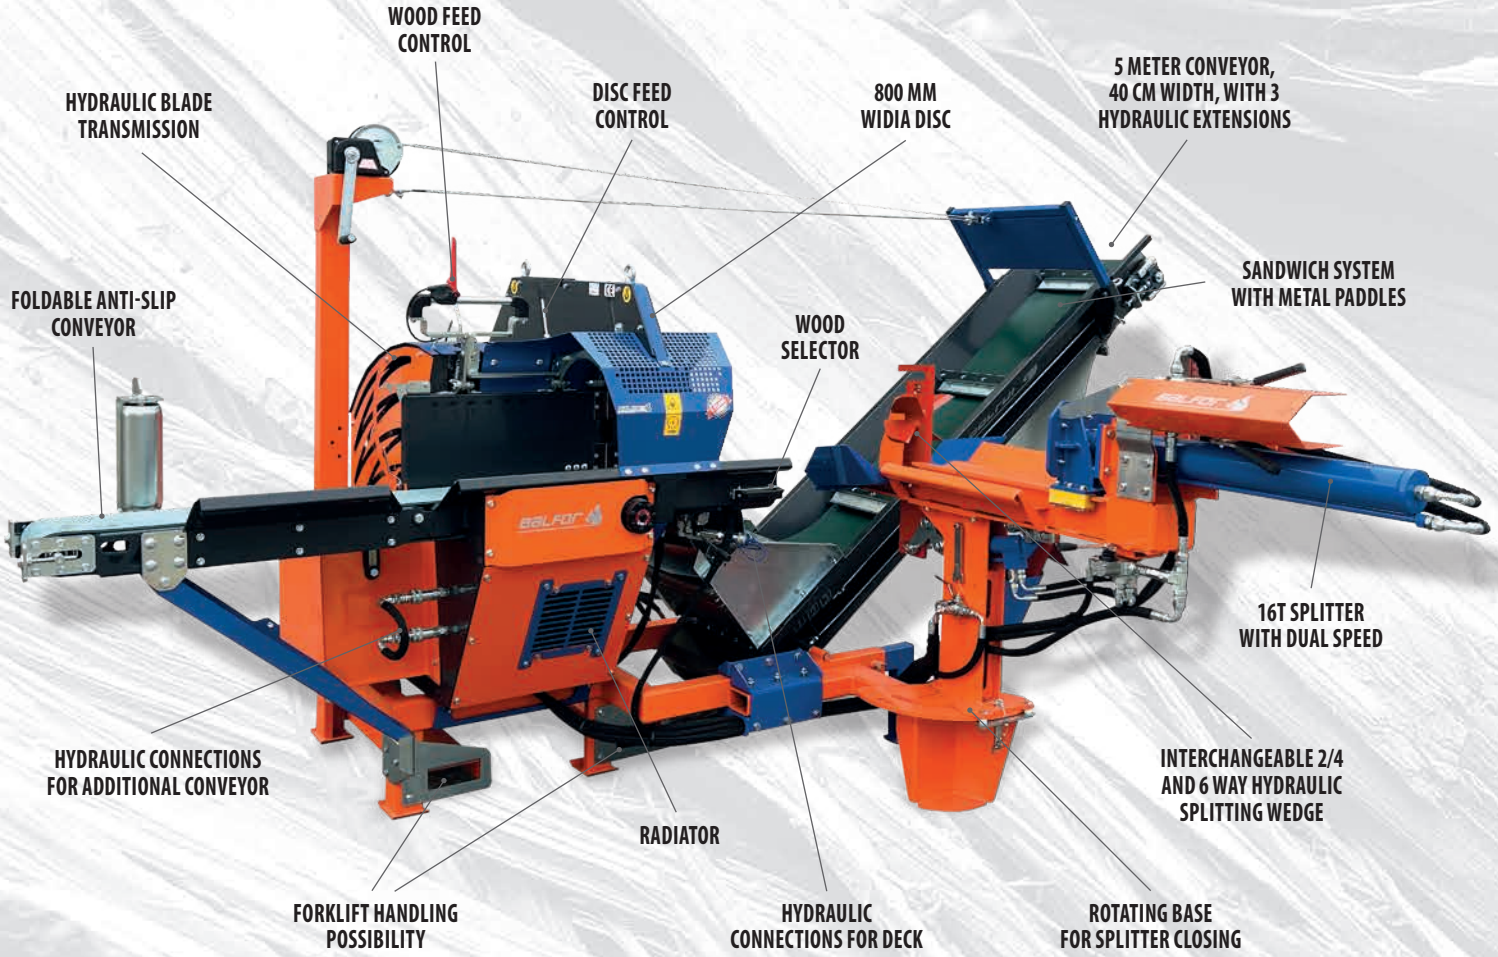

NINJA 800 Expert is the latest addition to the BALFOR range, a true mobile plant for firewood production. Thanks to its great versatility, **NINJA 800 Expert** can work on all types of wood, branches and logs. By opening or closing the log support positioned after the cutting blade, the operator decides whether the wood should fall directly onto the conveyor or be taken again to be split. The log splitter develops 16 tons of power and is equipped with a robust hydraulic wedge supplied with two interchangeable splitting wedges. The wide conveyor with three hydraulic extensions allows fast and effective evacuation of all the wood processed by the machine. Log feeding takes place via conveyor belt and the advancement of the 800 mm WIDIA blade is fully hydraulic. The operator therefore only needs to operate the levers as in all firewood processing plants. Being fully hydraulic, maintenance is minimal and, to avoid overheating, an oversized tank combined with a large oil radiator has been installed. **NINJA 800 Expert** is already equipped with connections for chain conveyor systems in order to automate the process as much as possible.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		TON		Ø cm		KG	cm	LITERS OIL	RPM	HP	Euro
25531	**NINJA 800 EXPERT** Tractor PTO	16	800-5.2-72 WIDIA	33	5m/43cm	940	235x150x200	75	430	50	**13532,06**
25532	**NINJA 800 EXPERT ROAD** Tractor PTO	16	800-5.2-72 WIDIA	33	5m/43cm	1.040	235x160x270	75	430	50	**15651,16**

PARTNERS

OPTIONALS

		Euro
OPNINJ1	Power PTO 11 KW 36A	**4992,00**





INCLUDED

YouTube

MULTICUT



MULTICUT is Balfor's automatic multi-blade saw; thanks to the triple-blade system and the possibility of setting the cut to all lengths, **MULTICUT** is the automatic saw with an hourly productivity never seen before. Sawdust is evacuated thanks to a high-performance fan, allowing the operator to work in maximum comfort. Cutting lengths are multiple: 25, 30, 33, 40 and 50 cm, easily adjustable thanks to two handles positioned at the rear. High productivity and reliability are the main characteristics of this machine. The loading star rotates continuously and the operator only needs to load; **MULTICUT** takes care of the rest.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		cm	ø cm		KG	cm	LITERS OIL	HP	Euro
42541	**MULTICUT** Tractor PTO	25/30/33/40/50/60	18	5m/43cm	1940	250x260x200	200	60	**27538,36**

PARTNERS



YouTube

CONTINENTAL 416 JOY

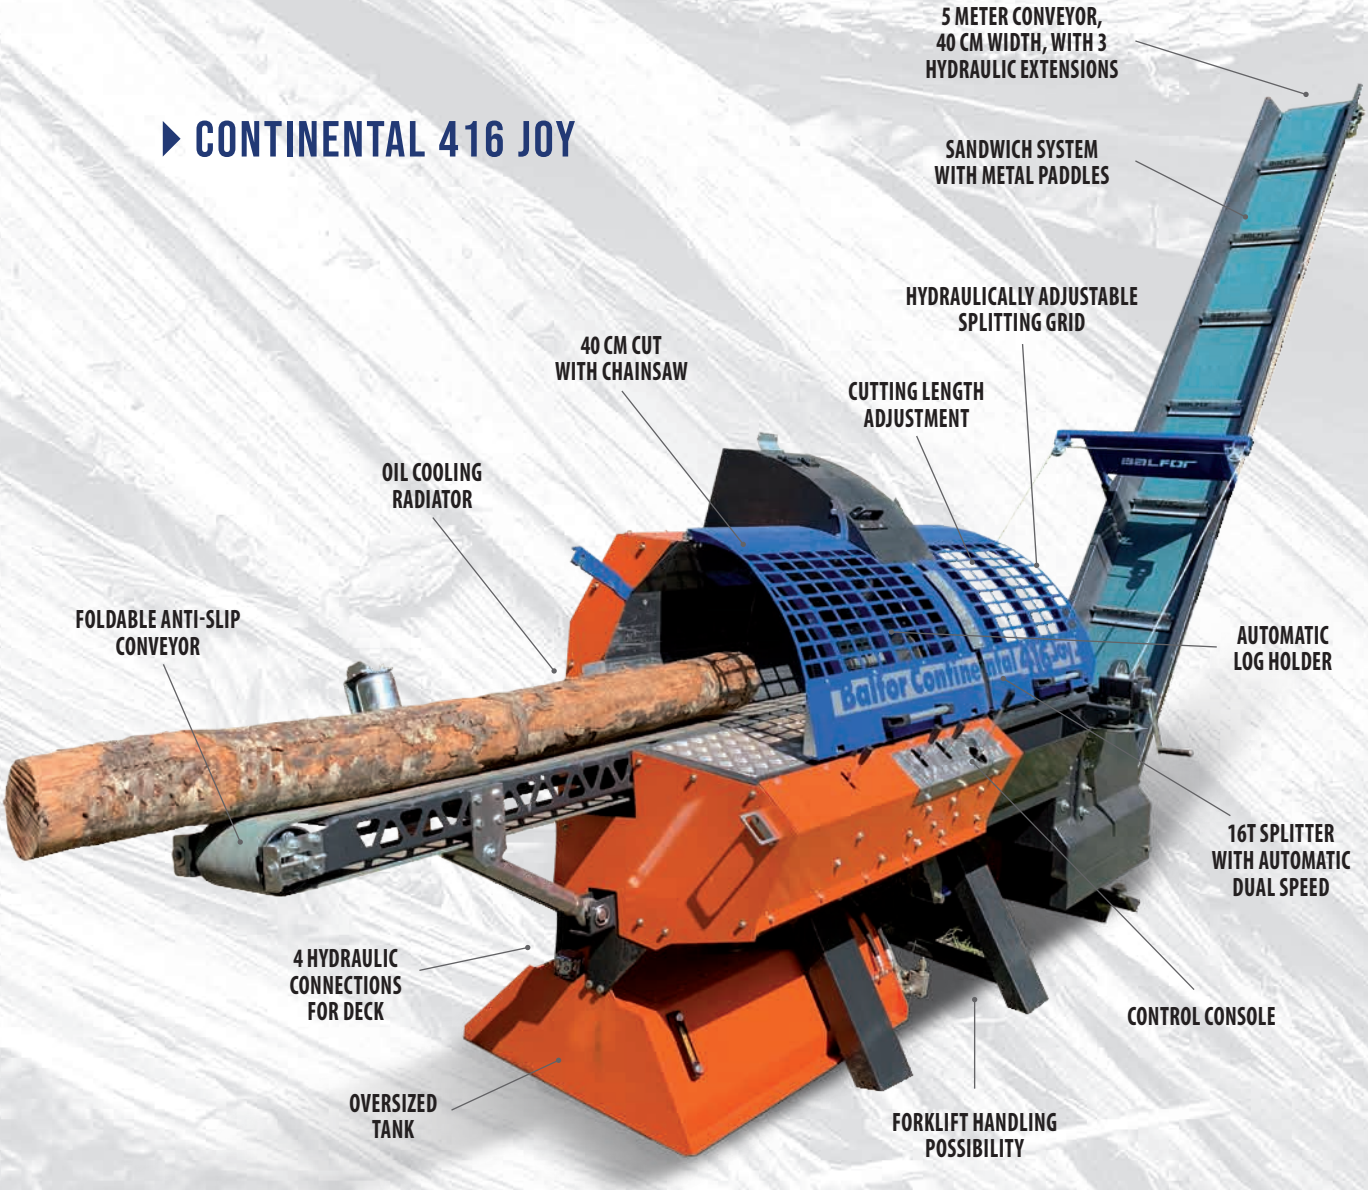

CONTINENTAL 416 is a high-productivity firewood processor. Thanks to the 400 mm cutting capacity guaranteed by the powerful hydraulic chainsaw and the 16-ton splitting force, this processor can work even on hard and knotty wood. The operator controls are hydraulic and the hydraulic wedge made of DOMEX® material allows splitting your logs by centering them perfectly, avoiding waste or asymmetrical splits. The supplied splitting wedges are 3 (2/4 - 6 - 8). Continental 416 is equipped with an oversized tank, cooling radiator, several compartments for storing tools or the oil can. It is also equipped with a 3-extension hydraulic conveyor and hydraulic connections for the use of a chain conveyor.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		TON	cm	Ø cm	m	KG	cm	LITERS OIL	HP	Euro
41394	CONTINENTAL 416 C JOY Tractor PTO	16	60	40	5m/40cm	1300	280x150x240	140	40	**24046,46**
47023	CONTINENTAL 416 ET JOY 380 Volt - 32A	16	60	40	5m/40cm	1300	280x150x240	140	15	**24810,24**
41498	CONTINENTAL 416 SB JOY ROAD Benzina/Petrol	16	60	40	5m/40cm	1300	280x200x250	140	35	**33713,47**

PARTNERS

OPTIONALS

CONTINENTAL 416 JOY		Euro
CLT0031	12 way wedge	**892,94**



OPTIONAL



INCLUDED



YouTube

CONTINENTAL 480 SPECIAL



CONTINENTAL 480 is the bigger sister of the smaller Continental 416 with additional features. In addition to what is described for the 416, it offers a multifunction electric joystick, a 48 cm cutting capacity, a 22-ton log splitter and a conveyor that can rotate to the right and left. The supplied splitting wedge is the 2/4-way but as an option we offer the 6, 8 or 12-way wedges. A truly high-performance and absolutely complete machine for the most demanding operators who want to maximize production.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		TON	cm	cm	m	KG	cm	LITERS	HP	Euro
41905	CONTINENTAL 480 C Special Tractor PTO	22	55	48	5m/43cm	1600	290x170x260	100	80	**35700,28**

PARTNERS

OPTIONALS

CONTINENTAL 480

		Euro
OPCONT2	12 way wedge	**1235,52**

		Euro
OPCONT4	POWER PTO 15 KW-63A (Continental 480)	**7648,99**



OPTIONAL



INCLUDED





YouTube



DOUBLE MOBILE SPLITTING GRID ON 2 AXES

50 TON SPLITTER WITH AUTOMATIC DUAL SPEED AND ADJUSTABLE STROKE

DOUBLE COOLING RADIATOR

LIGHTS FOR NIGHT WORK

6 METER CONVEYOR, 100 CM WIDTH, WITH 3 HYDRAULIC EXTENSIONS

70 CM CUT WITH CHAINSAW

CONTROL CONSOLE WITH JOYSTICK

3-METER DECK WITH THREE CHAINS FOR LOGS UP TO 5 METERS LONG

CYLINDER FOR DECK CLOSING

MOTORIZED ROLLER CONVEYOR FOR LOG FEEDING

TRACTOR PTO

HYDRAULIC STABILIZER

500 LITER TANK

REINFORCED WHEELS FOR TRANSPORT

WORKING PLATFORM

CONTINENTAL 750 C ROAD

CONTINENTAL 750 positions itself among the largest high-productivity processors on the market. With a 70 cm log passage diameter and a 50-ton splitting force, it is capable of performing in all situations. The **CONTINENTAL 750** is equipped with high-capacity wheels and a drawbar with hydraulic foot in order to be easily moved within the worksite. Standard features include the 3-chain infeed table for advancing logs, work light for low-visibility conditions, roller table with all rollers motorized, double mobile splitting grid 18 and 28 pieces, and a conveyor belt 100 cm wide and 6 meters long with hydraulic inclination. The operator works on an elevated platform and can control all machine functions. Required power: 90 HP tractor. The **CONTINENTAL 750** can easily be considered the most productive and effective in its category.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		TON	cm	Ø cm	m	KG	cm	LITERS OIL	HP	Euro
31779	CONTINENTAL 750 C ROAD Tractor PTO	50	65	70	6m/100cm	9000	570x245x350	500	90	**98592,00**
31781	CONTINENTAL 750 ET ROAD Tractor PTO	50	65	70	6m/100cm	9400	570x245x350	500	60	**106080,00**

Condizioni di sconto dimezzate

PARTNERS





CONTINENTAL 750 ET ROAD

ATTILA

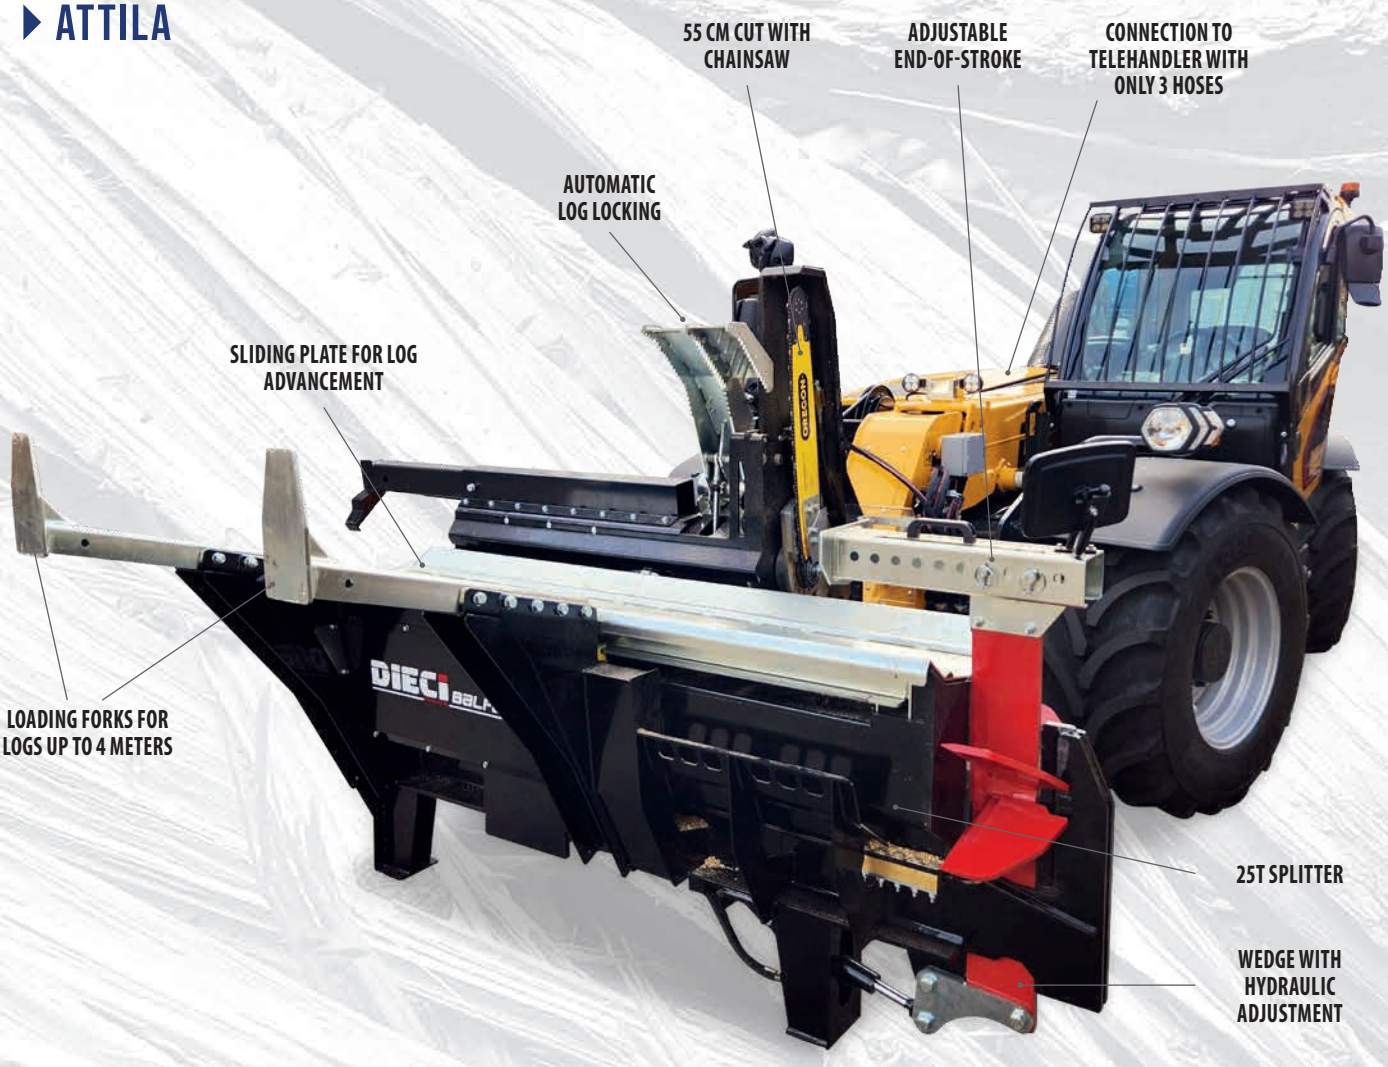

ATTILA was designed to process logs and transform them into firewood quickly with the assistance of a single operator. From the telehandler cab, the operator can carry out all operations from loading the logs to their transformation. The advantage of **Attila** is that, working at height, it can unload the split wood directly onto the trailer or stack it without having to handle it again. Compared to existing machines, **Attila** is equipped with the BOOST system that allows high performance even with low oil flow, as happens with telehandlers which, due to their very long arm, are subject to significant pressure losses. At the end of the cut, the splitter pusher automatically retracts by a few millimeters, distancing the freshly cut log from the chainsaw. This innovative system leaves space for positioning the newly cut log and allows the chainsaw to rise without touching the next log to be cut. **Attila** represents a new, modern, effective and patented technology to make the telehandler even more versatile for biomass production.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

Required hydraulic flow rate	90-130 liters/min
Operating hydraulic pressure	210-260 bar
Splitting force	25 ton
Hydraulic coupling	2x hose 3/4" + 1x hose 3/8" drainage
Electrical connection	12 v with indicator light
Maximum log diameter	550 mm
Maximum log length	3 m
Cut length adjustment	300-650 mm
Available wedges	4-6-8 ways
Weight	1600 kg
Dimensions (LxlxH)	2,3x1,6x1,9 m
Chainsaw bar length	750 mm
Rated chain speed	23-46 m/sec
Lubricating oil tank capacity	11 liters

Euro 23160,00

PARTNERS

ATTILA

		Euro
OPATT12	12 way wedge	1235,52



OPTIONAL



INCLUDED

SN+BR13





OPTIONAL





SS 800 EXPERT

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

	TON	cm	m	KG	LITERS OIL	H cm	cm	Volani cm	p.d.f	Euro
SS 80 + NTI	18	60	5	1200	130	45	580	80	350	

ART				
21691	**SS 800 C** Sega spacca D. 800 Tractor PTO carrellata senza nastro	(spaccalegna orizzontale 18 ton 2-4-6)		**15042,14**
21641	**SS 800 C EXPERT** Sega spacca D. 800 Tractor PTO carrellata con nastro trasportatore da 5 metri	(spaccalegna orizzontale 18 ton 2-4-6)		**21111,16**
21664	**SS 800 ET** Sega spacca D. 800 380 Volt (hp 5,5 + 5,5) carrellata senza nastro	(spaccalegna orizzontale 18 ton 2-4-6)		**17248,60**
21654	**SS 800 ET EXPERT** Sega spacca D. 800 380 Volt carrellata con nastro trasportatore da 5 metri	(spaccalegna orizzontale 18 ton 2-4-6)		**24605,56**
21678	**SS 800 C ET EXPERT (elettrica + Tractor PTO)** Sega spacca D. 800 380 Volt + Tractor PTO carrellata + nastro trasportatore 5 metri	(spaccalegna orizzontale 18 ton 2-4-6), ET (HP 5,5 + 5,5) e C		**27549,60**

OPTIONALS

SS 800			Euro
OPSS2	Professional roller conveyor		**1784,64**
OPSS3	Heat exchanger / Oil cooler	Tractor PTO version	**1401,50**

			Euro
OPSS4	Heat exchanger / Oil cooler	Electric version	**1528,80**

ART		TON	cm	KG	cm	H cm	H cm	HP	Euro
21503	**SN 440 EM** 220 Volt		43	150	182x56x85	29	91	3	**2447,32**
21514	**SN 440 ET** 380 Volt		43	150	182x56x85	29	91	3	**2447,32**
21523	**SN 520 EM** 220 Volt		50	200	202x62x100	38	91	3	**2779,29**
21534	**SN 520 ET** 380 Volt		50	200	202x62x100	38	91	3	**2779,29**
21573	**SN 620 EM** 220 Volt		61	260	217x83x120	42	92	3	**3136,22**
21584	**SN 620 ET** 380 Volt		61	260	217x83x120	42	92	3	**3136,22**
21541	**SN 620 C** Tractor PTO		61	269	217x83x120	42	92	/	**3314,68**
21568	**SN 620 C+ET** Tractor PTO - 380 Volt		61	285	217x83x120	42	92	3	**4016,06**
21557	**SN 620 C+EM** Tractor PTO - 220 Volt		61	285	217x83x120	42	92	3	**4016,06**
21614	**SN 720 ET** 380 Volt		70	320	237x85x125	48	93	3	**3951,16**
21591	**SN 720 C** Tractor PTO		70	318	237x85x125	48	93	/	**4168,32**
21608	**SN 720 C+ET** Tractor PTO + 380 Volt		70	334	237x85x125	48	93	/	**4920,86**
21621	**SS 620 C 13T** 12 Ton. Tractor hydraulics	13	61	395	260x140x135	42	92	/	**5201,66**
21631	**SS 720 C 13T** 12 Ton. Tractor hydraulics	13	70	443	280x140x135	48	93	/	**6055,29**

OPTIONALS

SN 440/520/620/720 - SS 620/720			Euro
OPSN4402	Wheeled frame	(only for private road)	**1146,91**
OPSN4403	Hold log cart		**572,83**

		Euro
OPSS6201	Log splitter kit powered via saw PTO shaft (non-hydraulic)	**955,96**

NT 5.5/300 PI



BALFOR conveyor belts are the most robust and heaviest on the market. Built to last and to reduce maintenance and spare parts to a minimum. Thanks to the modularity of the frame and PVC belt, it is possible to vary their length and repair them at low cost in case of damage to the PVC belt. The paddles are made of metal to maximize durability over time. Balfor conveyor belts are absolutely the most robust on the market. The modular structure ensures the frame is resistant to any stress; the metal paddles completely eliminate belt wear; furthermore, the modular belt allows replacing only the damaged element when necessary. The possibility of pallet packaging guarantees very low shipping costs.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		m	m	mm	HP	*IN KIT DI MONTAGGIO ASSEMBLY KIT PRICES Euro
52032	NT 5,5/300 PI Tractor Hydraulics	2,9/4	5,5	260	/	3546,00
52003	NT 5,5/300 EM 220 Volt	2,9/4	5,5	260	1	3771,00
52014	NT 5,5/300 ET 380 Volt - 16A	2,9/4	5,5	260	1	3771,00
52025	NT 5,5/300 SB Fuel Engine/Benz.	2,9/4	5,5	260	6	4296,00
52072	NT 5,5/400 PI Tractor Hydraulics	2,9/4	5,5	360	/	3750,00
52043	NT 5,5/400 EM 220 Volt	2,9/4	5,5	360	1	3975,00
52054	NT 5,5/400 ET 380 Volt - 16A	2,9/4	5,5	360	1	3975,00
52065	NT 5,5/400 SB Fuel Engine/Benz.	2,9/4	5,5	360	6	4476,00
52102	NT 6,5/300 PI Tractor Hydraulics	3,4/4,5	6,5	260	/	3726,00
52083	NT 6,5/300 EM 220 Volt	3,4/4,5	6,5	260	1	3951,00
52094	NT 6,5/300 ET 380 Volt - 16A	3,4/4,5	6,5	260	1	3951,00
52115	NT 6,5/300 SB Fuel Engine/Benz.	3,4/4,5	6,5	260	6	4476,00
52152	NT 6,5/400 PI Tractor Hydraulics	3,4/4,5	6,5	360	/	3966,00
52123	NT 6,5/400 EM 220 Volt	3,4/4,5	6,5	360	1	4191,00
52134	NT 6,5/400 ET 380 Volt - 16A	3,4/4,5	6,5	360	1	4191,00
52145	NT 6,5/400 SB Fuel Engine/Benz.	3,4/4,5	6,5	360	6	4692,00

OPTIONALS

NT		Euro
OPKITNT	Packed on pallet	240,00



LEGIONAR 70.6



TILTING GRID

QUICK OPENING PULLEY

CHAIN HOLDER NOTCHES

PATENTED BRAKE ADJUSTMENT SYSTEM

ABR SYSTEM

TOW HOOK HOUSING

DOMEX
REINFOCED SHIELD





CLUTCH WITH INTERCHANGEABLE INSERTS

The **LEGIONAR series winches**, in addition to their eye-catching, modern design, deliver outstanding performance and exceptional durability over time. Thanks to the carbon clutch with a doubled friction surface, service life is extremely long. Moreover, the clutch features interchangeable inserts: when worn, only the inserts need to be replaced, not the entire ring gear.
SKF bearings and wear-resistant steel make the Legionar the best choice you can make for your forestry work.
The compacted steel cable is supplied as standard with all machines, along with the half-shield pulley (from 5-ton models upwards) and the towing hook. The machine is further equipped with a storage compartment, two chain holders, a chainsaw holder, and-on larger models-work lights. The R models operate at a reduced speed, ranging from 0.9 meters per second down to 0.6 meters per second. The ABR System is a patented Balfor system available exclusively on the Legionar range. It allows brake tension to be adjusted during controlled tree felling or when dealing with a jammed stump.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART										Euro
98431	Legionar 50.4	4	5	70 m / 10 mm	260	h 190/120	0,80	350 max	35	**3780,00**
98432	Legionar 60.5	5	6	70 m / 10 mm	335	h 195/130	0,90	350 max	50	**4296,00**
105457	Legionar 60.5 R	5	6	70 m / 10 mm	340	h 195/130	0,60	350 max	40	**4620,00**
98433	Legionar 70.6	6	7	90 m / 11 mm	365	h 220/150	0,90	350 max	65	**4608,00**
105458	Legionar 70.6 R	6	7	90 m / 11 mm	371	h 220/150	0,60	350 max	55	**5076,00**

PARTNERS





LEGIONAR 50.4



LEGIONAR 60.5



LEGIONAR 70.6R







OPTIONALS

LEGIONAR

		Euro
OPV4	Skidding chains with square link D8x3 meters blue square ring color	**99,84**
OPV12	Pulley 4 Ton.	**323,23**
OPV7	Pulley 6 Ton.	**404,35**
OPV6	Coupling chocker D8	**52,41**

LEGIONAR 70.6H







CLUTCH WITH INTERCHANGEABLE INSERTS

The **LEGIONAR H winches** are electro-hydraulic machines, featuring a fully independent, self-powered hydraulic system that can be operated either via a wired control or by radio remote control (optional).
Two types of remote control are available:
EVO is the entry-level version, with a handheld control unit that is practical and easy to use.
PRO is the professional hands-free remote control, with the control unit worn on the belt and operated by toggle levers. The Pro remote comes equipped with long-lasting Endurance lithium batteries.
H models can also be fitted with the new hydraulic Unwinding Device (HUD), which enables automatic cable unwinding. This innovative and highly practical system relieves the operator of the effort required to pull the cable off the winch drum.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART					KG	cm	m/s	RPM	HP	Euro
104690	Legionar 70.6 H	6	7	90 m / 11 mm	420	h 220/150	0,60	350 max	60	**6840,00**
105456	Legionar 80.7 H	7	8.4	90 m / 12 mm	560	h 240/170	0,60	350 max	70	**8472,00**
105455	Legionar 110.9 H	9	10.1	100 m / 13 mm	650	h 250/180	0,60	350 max	80	**10128,00**
104690	Legionar 70.6 HPR*	6	7	90 m / 11 mm	450	h 220/150	0,60	350 max	60	**8268,00**
105456	Legionar 80.7 HPR*	7	8.4	90 m / 12 mm	590	h 240/170	0,60	350 max	70	**9888,00**
105455	Legionar 110.9 HPR*	9	10.1	100 m / 13 mm	680	h 250/200	0,60	350 max	80	**11544,00**

PARTNERS





LEGIONAR 70.6HPR



LEGIONAR 81.7H



LEGIONAR 110.9H



*UNROLLER HPR
WITH CABLE STOP



PRO OPV2
REMOTE CONTROL



EVO OPV1
REMOTE CONTROL

OPTIONALS

LEGIONAR

		Euro
OPV4	Skidding chains with square link D8x3 meters blue square ring color	**99,84**
OPV12	Pulley 4 Ton.	**323,23**
OPV7	Pulley 6 Ton.	**404,35**
OPV2	PRO remote control (only mod. H)	**1200,00**
OPV1	EVO remote control (only mod. H)	**720,00**

		Euro
OPV6	Coupling chocker D8	**52,41**

BF 150 C

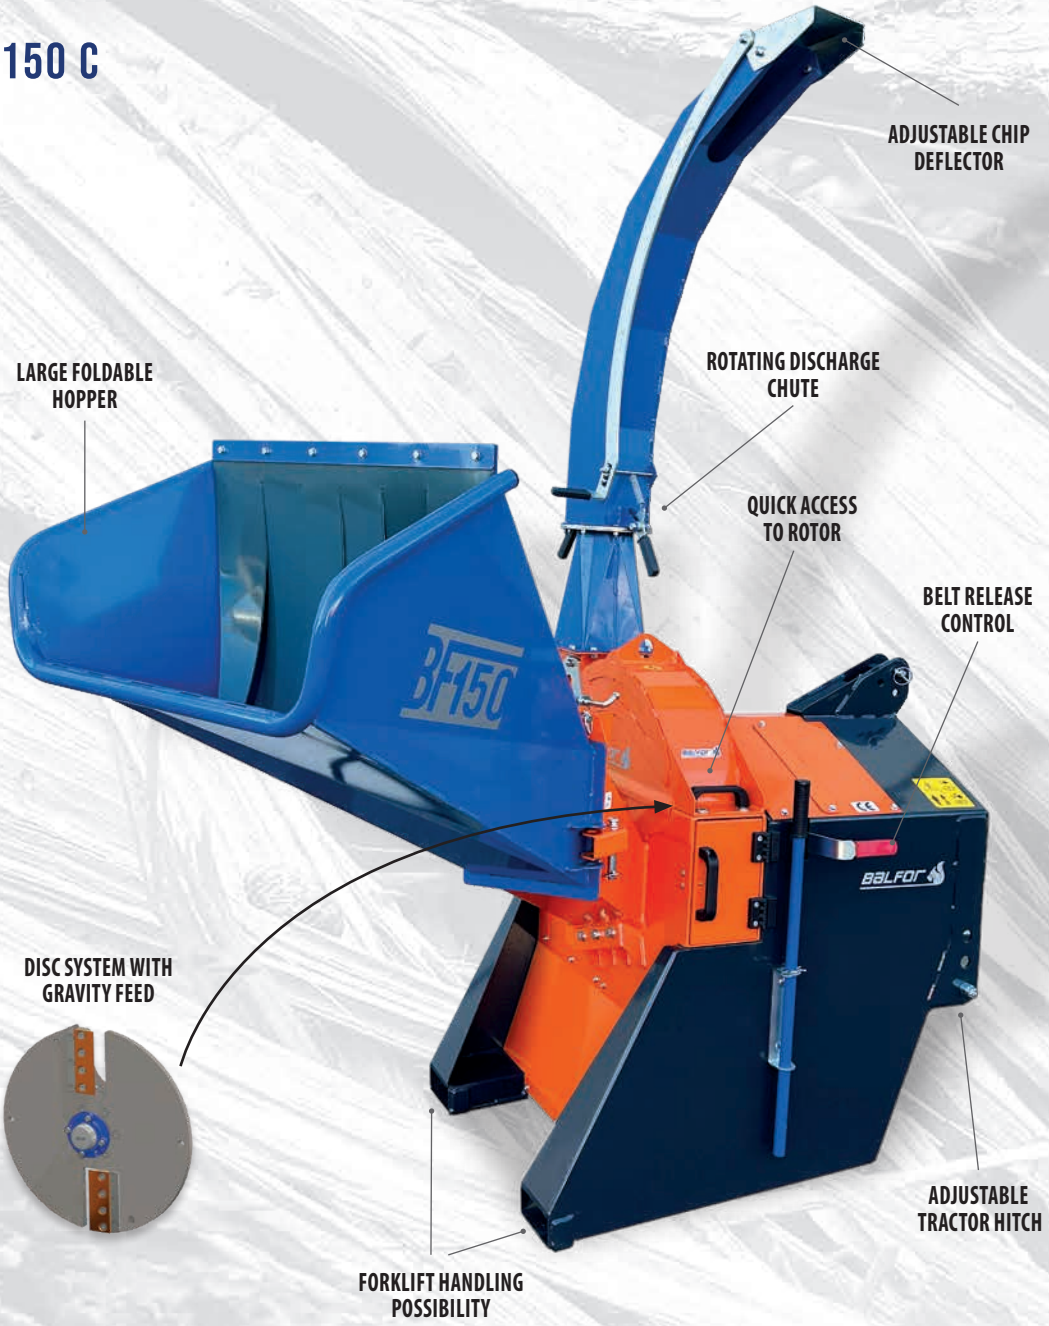

The **BF 150** is a machine capable of shredding green wood branches up to 15 cm in diameter. The branches advance by gravity and because they are pulled in by the knives themselves. The BF 150 chipper operates with a transverse rotor with a disc system with 2 knives. It is the ideal machine for shredding branches, prunings and logs even of medium or large dimensions. The discharge chute rotates 270° and is adjustable thanks to practical handles located on the chute. The hopper is foldable for transport and measures 76 cm x 50 cm.

The **BF 150** is entirely built in high-quality steel to guarantee maximum durability over time and optimal resistance to stress.

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

TECNICAL DATES

ART		Ø cm	KG	cm	HP	Euro
72500	**BF 150 C** Cardan - PTO	15 cm	420	190x150x250	40	**6240,00**

PARTNERS





ACCESSORI

ART		Euro
OPCONT9	Log support table with roller conveyor	2424,86



ART		Euro
OPCONT14	Arm loader (Continental 480)	4079,71



ART		Euro
ASPIRATOR	Hydraulic sawdust extractor	1478,88
SC-500-S-00	Sawdust collector	1364,06

SC-500-S-00



ART		Euro
M-00983-00	Screen for Continental 480, Continental 416, Ninja 800 Expert, Shark 700 Expert	1061,29

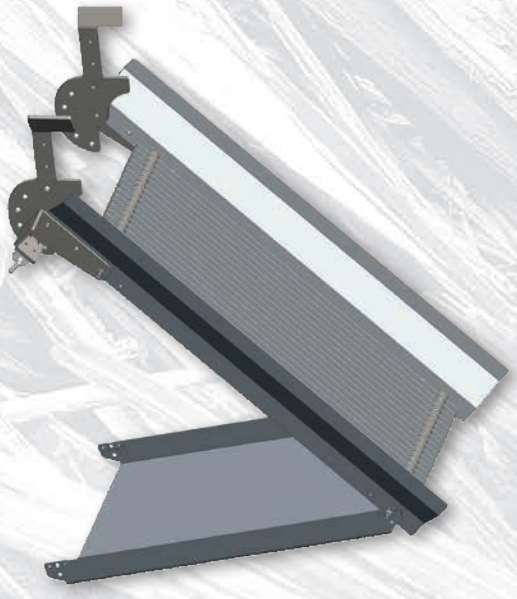

Via Galimberti, 64 • 12030 MANTA (CN) ITALY • Tel. 0039.0175.289070 / 0039.0175.289391 • info@balfor.it

ACCESSORI

ART	Euro
DECK 2/3	6000,38



ART	Euro
DECK 2/5	8414,00



ART	Euro
DECK 3/3	7418,11



ART	Euro
DECK 3/5	13004,16

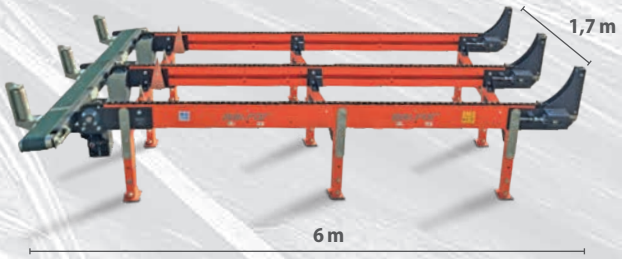



CONTACT US FOR MORE INFORMATION!

Via Galimberti, 64 • 12030 MANTA (CN) ITALY
Tel. 0039.0175.289070 / 0039.0175.289391
Fax 0039.0175.289016 • info@balfor.it

www.balfor.it

PARTNER

